

RATINGS:

200A MAXIMUM - SEE MAIN BREAKER RATING.

240/120 V ~, 3Ø 4W DELTA

208Y/120 V ~, 3Ø 4W

240 V ~, 3Ø 3W

WHEN USED ON A 240/120 V ~, 3 PHASE, 4 WIRE DELTA SYSTEM, THE CENTER BUS MUST BE CONNECTED TO THE PHASE HAVING THE HIGHEST VOLTAGE TO GROUND. ALL BREAKERS CONNECTED TO THIS BUS MUST BE RATED 240 V ~. WHEN USED ON A 240 V ~, 3 PHASE, 3 WIRE SYSTEM, ALL BREAKERS MUST BE RATED 240 V ~.

FOR INSTALLATION BY A QUALIFIED PERSON IN ACCORDANCE WITH ALL LOCAL ELECTRICAL CODES AND/OR THE NATIONAL ELECTRICAL CODE ®.

SUITABLE FOR USE AS SERVICE

EQUIPMENT. WHEN USED AS SERVICE EQUIPMENT, APPLY "SERVICE DISCONNECT" LABEL TO FRONT NEXT TO MAIN BREAKER HANDLE.

WHEN USED AS SERVICE EQUIPMENT, UNUSED NEUTRAL BAR TERMINALS MAY BE USED TO TERMINATE EQUIPMENT GROUNDING WIRES IN THE COMBINATIONS INDICATED FOR EQUIPMENT GROUND BAR TERMINALS.

REMOVE TWISTOUTS FROM TRIM ONLY WHERE BREAKERS WILL BE INSTALLED. ALL OPENING MUST BE FILLED WITH BREAKERS OR FILLER PLATES.

TO RESET BREAKERS WITH TRIPPED HANDLE POSITION BETWEEN "ON" AND "OFF", MOVE HANDLE TO "OFF" THEN TO "ON".

SUM OF MH-T BREAKER RATING IS NOT TO EXCEED 110 AMPS PER BRANCH CIRCUIT BUS STAB.


| CONDUIT HUBS | |
|--------------|----------|
| TRADE SIZE | CAT. NO. |
| 1-1/4 INCH | ECHS125 |
| 1-1/2 INCH | ECHS150 |
| 2 INCH | ECHS200 |
| 2-1/2 INCH | ECHS250 |

| ACCESSORIES | |
|------------------------|--|
| DESCRIPTION | CAT. NO. |
| INS. NEUTRAL TIE STRAP | ECINTS |
| MAIN BREAKER RETAINER | ECMBR1 |
| FILLER PLATE | ECPF3 |
| SUBFEED LUG KIT | ECLK2125 ECLK2150 ECLK2225 ECLK3150 ECLK3225 |

SHORT CIRCUIT CURRENT RATING THIS PANELBOARD HAS A MAXIMUM SHORT CIRCUIT CURRENT RATING OF 10,000 AMPS RMS SYMMETRICAL, 240 V~ WITH SIEMENS (MURRAY BRAND) TYPE MQ MAIN BREAKER INSTALLED AND WHEN USED WITH SIEMENS (MURRAY BRAND) MP-T, MH-T, MP-HT, MP-MT, MP-GT, MP-HGT, MP-AT, MP-HAT, MP-ET AND MP-HET CIRCUIT BREAKERS. ANY CIRCUIT BREAKER INSTALLED, REPLACED, OR ADDED IN THIS PANELBOARD MUST BE MANUFACTURED BY SIEMENS (MURRAY BRAND) AND MUST BE ONE OF THE ABOVE TYPES. USE OF OTHER CIRCUIT BREAKERS IN THIS EQUIPMENT WILL VOID THE WARRANTY.

USE COPPER OR ALUMINUM 60°/75°C WIRE

| TERMINALS | WIRE | TORQUE |
|--|--------------------------------------|--|
| A, B, C | SEE MARKING ON BREAKER | |
| N | 250 KCML - 4 AWG | 340 LB-INS |
| G | 2/0 - 4 AWG | 45 LB-INS |
| NEUTRAL/GROUND (USE TYPE "ECGB" GROUND BAR KIT ACCESSORY) | 14-10 AWG 8 AWG 6 AWG 4 AWG | 20 LB-INS 25 LB-INS 35 LB-INS 45 LB-INS |
| GRD CONDUCTORS ONLY | (2) or (3) 14 AWG (2) 12-10 AWG | 20 LB-INS |
| ECLK1-2 (ACCESSORY) | 2/0-2 AWG | 45 LB-INS |
| ECLK2 (ACCESSORY) | 2/0-4 AWG | 135 LB-INS |
| ECLK3 (ACCESSORY) | 300 KCML - 1 AWG | 340 LB-INS |
| BRANCH BREAKERS | SEE MARKING ON BREAKER | |
| TYPE "ECLK" SUBFEED LUG KIT | SEE MARKING ON LUG KIT | |

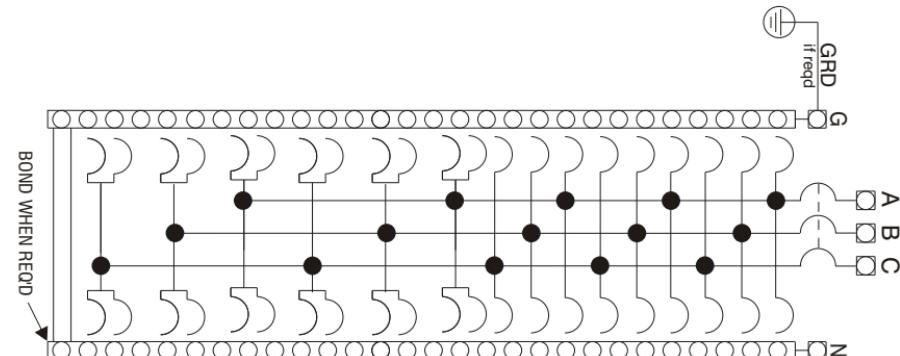

Assembled in Mexico

® The National Electrical Code is a registered trademark of the National Fire Protection Association.

© 2007 Copyright Siemens Energy & Automation, Inc.

4094926 Rev.B

Murray Electrical ProductsSiemens Energy & Automation, Inc.
Alpharetta, Georgia U.S.A.

J2

MURRAY

IMPORTANT: DO NOT ALLOW PETROLEUM BASED (HYDROCARBON) SPRAYS, CHEMICALS, SOLVENTS OR ANY PAINT TO CONTACT INTERIOR COMPONENTS. PETROLEUM BASED CHEMICALS CAN CAUSE DEGRADATION OF ELECTRICAL INSULATING MATERIALS.

DANGER

Hazardous Voltage.
Will cause death, serious injury
or substantial property damage.

Turn off power supplying this
equipment before working inside.

**PELIGRO**

Voltaje peligroso. Causará la
muerte, lesiones graves o daño
substancial a la propiedad.

Desconecte el suministro de energía a este
equipo antes de trabajar en su interior.