
More on

Secure, Joist Mount Bracket Installation!

One-piece Box Design • No Pieces to Lose

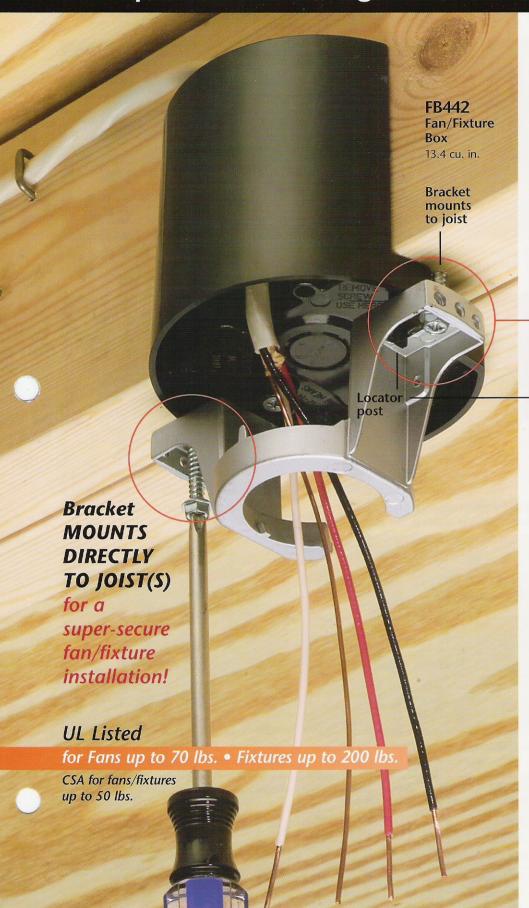

The **FB444** fan/fixture box is a 26.5 cubic inch box that mounts securely to single or double joists with a shipped-in-place center screw. A 2-hour fire rating, plus the ability to support fans up to 70 lbs. and fixtures up to 200 lbs. (for UL), make the FB444 an ideal choice for your installation.

The **FB442** and **FB443** are slightly smaller boxes, but offer the same great features and benefits.

Locator posts assure that the fan /fixture **bracket** is positioned properly for MOUNTING DIRECTLY TO THE JOIST.





These boxes ship with an installed NM cable connector, mud cover, and captive installation screws for both the box and the mounting bracket.



1 Stauffer Industrial Park. Scranton, PA 18517 800/233-4717 • FAX 570/562-0646 www.aifittings.com

FB442/443/444 0704/50M

©2004 Arlington Industries, Inc.

Joist Mount Fan/Fixture Boxes!

with Bracket Locator Posts • UL/CSA Listed

FB442 • FB443 • FB444

- Fast, easy to install
- Safe, secure installation bracket mounts directly to single or double joists
- Locator posts assure proper positioning of fan/fixture bracket
- Shipped-in-place center screw, installed NM cable connector, and bracket installation screws save time! – No parts to lose
- Shipped-in-place mud cover keeps box clean until you're ready to install the fan/fixture
- UL listed for fans up to 70 lbs, fixtures up to 200 lbs.
 CSA listed for fans and fixtures up to 50 lbs.





1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com

©2004 Arlington Industries, Inc.



1 Position **FB442** box alongside joist. Tighten center screw, mounting box to joist.



NOTE Position mounting bracket over locator posts to assure proper postion.



4 Follow manufacturer's instructions to install fan or fixture.

	UPC/DCI/NAED MFG #01 8997		Depth (inches)	Unit/Std Pkg
FB442	72194	13.4	3.27	25
FB443	72197	17.5	4.57	25
FB444	72187	26.5	3.5	25

Patent pending



2 Pull wires. After finished ceiling is installed, remove bracket installation screws and use them to install the bracket (Step 3).



3 Mount fan/fixture bracket using the installation screws you removed in Step 2.



OPTIONAL If necessary, the bottom of the **FB444** box can be opened to re-stuff wires.

Distributed by	