

SNAP-TITE® Connector




With spring steel clip. For NM • SE cable. Zinc die-cast.
(See page E-1 for ring removal instructions.)

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	CABLE RANGE
842ST	80084	3/4	3/4	50	500	.510	1.070	1.200	.300 - .780

SNAP-TITE® products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information, see page 7.

PATENTED.



Cable Connectors

For NM • SE • MCI • MCIA • AC cable. For steel and aluminum jacketed cables. Zinc die-cast.



840



8400




8401

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	CABLE RANGE
840*	00840	3/8	1/2	100	1000	.422	.825	1.105	.225 - .610
8400*	08400	3/8	1/2	100	1000	.422	.825	1.105	.225 - .610
8401*	08401	3/8	1/2	100	1000	.422	.825	1.105	.225 - .610
8402	08402	3/4	3/4	50	500	.533	1.093	1.395	.375 - .780

Refer to pages C-13 and C-14 for complete cable ranges.

*Listed for MCI only. UL# E123751.

For connectors that cost less and install faster, see page C-8.

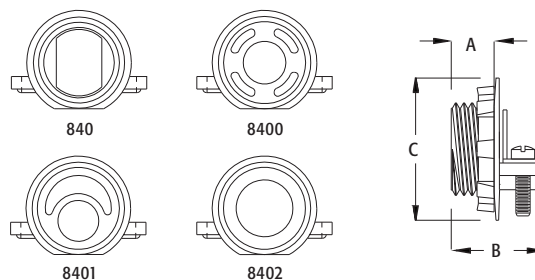


Combination Coupling

EMT to NM. Zinc die-cast.



CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	UNIT PKG	STD PKG	DIM A	DIM B	CABLE RANGE
8600	08600	1/2	50	500	1.162	1.090	.250 - .612



Cable Connectors

AC • MCI • NM • SE. Zinc die-cast.



840



8400



8401

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	CABLE RANGE	END STOP DIAMETER
840‡	00840	1/2	100	1000	.350	.825	1.085	.225-.610	.400 x .580
8400‡	08400	1/2	100	1000	.350	.825	1.085	.225-.610	.400
8401	08401	1/2	100	1000	.500	.825	1.085	.225-.610	.375
8402	08402	3/4	50	500	.533	1.093	1.386	.525-.780	.620
8403*	08403	1	25	250	.428	1.072	1.500	.780-.980	.840
8404*	08404	1-1/4	10	100	.490	1.144	1.872	1.050-1.345	1.030
8405*	08405	1-1/2	10	50	.625	1.357	2.120	1.410-1.633	1.390
8407*	08407	2	10	50	.652	1.434	2.594	1.640-2.040	1.750
8408*	72166	2-1/2	-	10	.968	1.965	3.235	1.950-2.480	1.924
8409*	72168	3	-	5	1.125	2.180	3.890	2.420-3.070	2.390
8410*	72170	3-1/2	-	5	1.125	2.284	4.392	2.860-3.600	2.830



*Listed for MC only. UL# E123751.

‡Also for MCI-A cable. See page E-30 and E-31 for MCI-A cable ranges.

Refer to chart on page E-28 for a list of cable types.

Refer to page E-10 for new MC cable connectors with our largest cable ranges.

Concrete tight when taped.

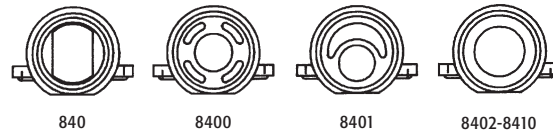

SNAP-TITE® Connectors

With spring steel clip. Zinc die-cast. For NM • SE • MCI • MCI-A • Flex • AC steel and aluminum jacketed cables.

SNAP-TITE® and SNAP2IT® products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information see page 7.

(See page E-1 for ring removal instructions.)



840ST



8400ST

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	CABLE RANGE	END STOP DIAMETER
840ST	80070	3/8	1/2	100	1000	.510	.985	.912	.225-.610	.400 X .580
8400ST	80074	3/8	1/2	100	1000	.510	.985	.912	.225-.610	.375

Refer to chart on page E-28 for a list of cable types.

See page E-30 and E-31 for MCI-A cable ranges.

Concrete tight when taped.

