

CATALOG NUMBER

ECINSNB43

electricCenter
ACCESSORIES

Insulated Neutral Kit 100-125A, 43 Position

Same As:

■ INSNB43



INSTRUCTIONS FOR THE INSTALLATION OF A 100-125A INSULATED NEUTRAL KIT



⚠ DANGER

Hazardous Voltage.
Will cause death, serious injury
or substantial property damage.

Turn off power supplying this
equipment before working inside.

⚠ SAFETY INSTRUCTIONS

Note: This instruction outlines the
recommended installation procedure.
To be used only where specified and
required by catalog number on the
load center label.

- ① Secure Neutral Tie Strap to enclosure with #10-32 x 1/4" screw (provided) as shown in Fig.2.
- ② Remove Bonded Neutral Bar by removing (2) screws.
- ③ Install Insulated Neutral Assembly using (2) 10-32 x 3/4" screws (provided) as shown in Fig.2. Torque screws to 20 lb-ins minimum.
- ④ Remove "Service Disconnect" label if applicable.
- ⑤ Install pressure sensitive "Warning" label (provided) to enclosure, above main breaker or main lugs.
- ⑥ Refer to load center wiring diagram label for proper wire sizes and terminal torques.

FIG.1
(BEFORE)

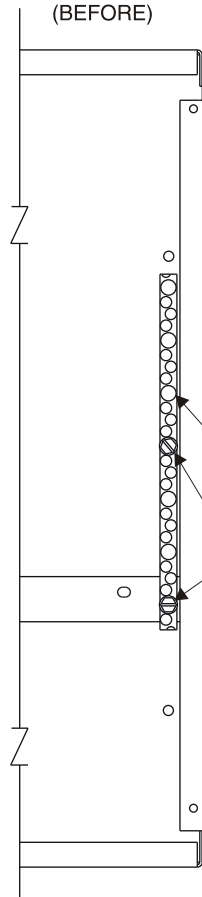


FIG.2
(AFTER)

