

Fan & Fixture Mounting Box

Locator posts for positioning of bracket installation screws



FB444 INCLUDES...

A ready-to-tighten center screw, installed NM cable connector, mud cover, multiple KOs, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

Our deepest L-shaped fan/fixture box mounts securely to single or double joists with a shipped-in-place center screw.

FEATURES AND BENEFITS


- No loose parts to misplace—totally self-contained!
- Arlington's deepest fan box!
- Easy wire access
- Locator posts assure proper positioning of fan/fixture bracket
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB444	72187	For 1/2" or 5/8" Drywall 25.6 Cu. In.	25	25	5.330	4.000	4.716

Refer to chart on page R-22 for load ratings and number of single conductors.

PATENTED.

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.

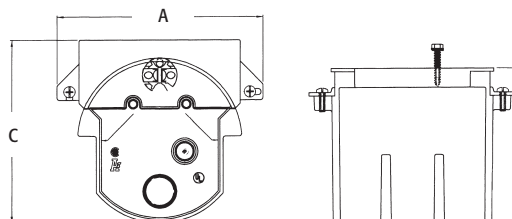

INSTALLATION INSTRUCTIONS



1. Position box alongside joist. Tighten center screw, mounting box to joist.
2. Position mounting bracket over locator posts to assure proper position.
3. Remove captive bracket installation screws. Use them to mount fan/fixture bracket.

OPTIONAL

If necessary, the bottom of the box can be opened to access wires.

4. Pull wires through knockout.
(Installation of drywall not shown.)

