


## Broan Heaters—Wall Control

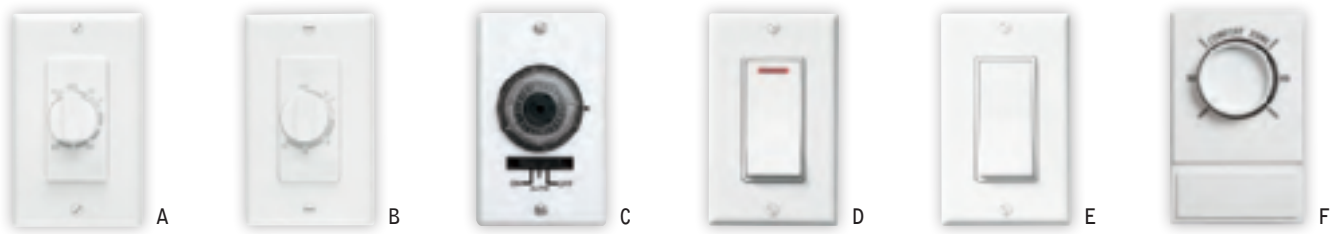

### A. Model 59W, 59V

- Timer control up to 60 minutes
- Fits single-gang box
- 120V, 20 amps; 240V, 10 amps
- Blister packs available
- Operate continuously or for any set period

### B. Model 61W, 61V

- Timer control up to 15 minutes
- Fits single-gang box
- 120V, 20 amps; 240V, 10 amps
- Blister packs available
- Operate for any set period up to 15 minutes (no "continuous on" position)

### C. Model T24H

- 24-Hour programmable timer
- 120V, 8 amps inductive load
- Sets up to 36 on/off cycles as short as 20 minutes
- Manual on/off override switch
- Fits single-gang box

### D. Model 69WL, 69VL

- Single-Function Control with indicator light
- Red light indicates power is on
- For use with Ultra Silent™ Series fan units, or Remote In-Line Ventilators
- 120V, 20 amps
- Blister packs (P69WL, P69VL)

### E. Model 69W, 69V

- Single-Function Control
- 120V, 15 amps

### F. Model 86W

- For use with heater models 120, 124 and 128 (see page 7)
- Single-pole, 120V/240VAC, 22 amps
- 50° to 85° temperature range
- Snap-action, bimetallic sensing strip

## Heaters

|        | Heater<br>Wattage | Volts   | Amps       | BTU/hr     | Housing Dimensions |     |    | Grille Dimensions |     | Grille Finish      | Project Packs |                                                |
|--------|-------------------|---------|------------|------------|--------------------|-----|----|-------------------|-----|--------------------|---------------|------------------------------------------------|
|        |                   |         |            |            | W"                 | H"  | D" | W"                | H"  |                    | Housing       | Finish Kit                                     |
| 112    | 750               | 120     | 6.3        | 2560       | 18                 | 3%  | 12 | 19%               | 3%  | White Baked Enamel |               |                                                |
|        | 1125              | 208     | 5.4        | 3840       | 18                 | 3%  | 12 | 19%               | 3%  |                    |               |                                                |
| 114    | 1500              | 120     | 12.5       | 5120       | 18                 | 3%  | 12 | 19%               | 3%  | White Baked Enamel |               |                                                |
|        | 1500              | 240     | 6.3        | 5120       | 18                 | 3%  | 12 | 19%               | 3%  |                    |               |                                                |
| 120    | 500/1000          | 120     | 4.16/8.33  | 1707/3413  | 10%                | 7%  | 3% | 14%               | 9%  | White Baked Enamel |               |                                                |
|        | 750               | 208     | 3.61       | 2560       | 10%                | 7%  | 3% | 14%               | 9%  |                    |               |                                                |
|        | 1000              | 240     | 4.16       | 3413       | 10%                | 7%  | 3% | 14%               | 9%  |                    |               |                                                |
| 124    | 750/1500          | 120     | 6.25/12.5  | 2560/5120  | 10%                | 7%  | 3% | 14%               | 9%  | White Baked Enamel |               |                                                |
|        | 1125              | 208     | 5.41       | 3840       | 10%                | 7%  | 3% | 14%               | 9%  |                    |               |                                                |
|        | 1500              | 240     | 6.25       | 5120       | 10%                | 7%  | 3% | 14%               | 9%  |                    |               |                                                |
| 128    | 750/1500          | 208     | 3.61/7.21  | 2560/5120  | 10%                | 7%  | 3% | 14%               | 9%  | White Baked Enamel |               |                                                |
|        | 1000/2000         | 240     | 4.16/8.33  | 3413/6827  | 10%                | 7%  | 3% | 14%               | 9%  |                    |               |                                                |
| 154    | 1250              | 120     | 10.7       | 4266       | 11 Dia             | 2%  | —  | —                 | —   | Satin Aluminum     |               |                                                |
| 157    | 1250              | 120     | 10.7       | 4266       | 11 Dia             | 2%  | —  | —                 | —   | Satin Aluminum     |               |                                                |
| 170    | 500/1000          | 120     | 4.16/8.33  | 1707/3413  | 10%                | 7%  | 3% | 12                | 9%  | White Baked Enamel | 171H          | 165F*, 165FT**, 167F*, 167FT**, 170F*, 170FT** |
|        | 750               | 208     | 3.61       | 2560       | 10%                | 7%  | 3% | 12                | 9%  |                    |               |                                                |
|        | 1000              | 240     | 4.16       | 3413       | 10%                | 7%  | 3% | 12                | 9%  |                    |               |                                                |
| 174    | 750/1500          | 120     | 6.25/12.5  | 2560/5120  | 10%                | 7%  | 3% | 12                | 9%  | White Baked Enamel | 171H          | 165F*, 165FT**, 167F*, 167FT**, 174F*, 174FT** |
|        | 1125              | 208     | 5.41       | 3840       | 10%                | 7%  | 3% | 12                | 9%  |                    |               |                                                |
|        | 1500              | 240     | 6.25       | 5120       | 10%                | 7%  | 3% | 12                | 9%  |                    |               |                                                |
| 178    | 750/1500          | 208     | 3.61/7.21  | 2560/5120  | 10%                | 7%  | 3% | 12                | 9%  | White Baked Enamel | 171H          | 165F*, 165FT**, 167F*, 167FT**, 178F*, 178FT** |
|        | 1000/2000         | 240     | 4.16/8.33  | 3413/6827  | 10%                | 7%  | 3% | 12                | 9%  |                    |               |                                                |
| 192    | 750/1500          | 208     | 3.61/7.21  | 2560/5120  | 14%                | 20  | 4% | 16%               | 20% | White Baked Enamel |               |                                                |
|        | 1000/2000         | 240     | 4.17/8.33  | 3413/6827  | 14%                | 20  | 4% | 16%               | 20% |                    |               |                                                |
| 194    | 1125/2250         | 208     | 5.41/10.82 | 3840/7677  | 14%                | 20  | 4% | 16%               | 20% | White Baked Enamel |               |                                                |
|        | 1500/3000         | 240     | 6.25/12.5  | 5120/10236 | 14%                | 20  | 4% | 16%               | 20% |                    |               |                                                |
| 198    | 1500/3000         | 208     | 7.21/14.42 | 5120/10240 | 14%                | 20  | 4% | 16%               | 20% | White Baked Enamel |               |                                                |
|        | 2000/4000         | 240     | 8.33/16.67 | 6827/13653 | 14%                | 20  | 4% | 16%               | 20% |                    |               |                                                |
| 6201   | 1200/1500         | 120     | 10.0/12.5  | 4095/5120  | 5%                 | 5%  | 6  | 3%                | 3%  | Grey Baked Enamel  |               |                                                |
| 9810WH | 1000              | 120/240 | 9.0/4.5    | 3413       | 10½                | 12½ | 3% | 11¾               | 14¾ | White Polymeric    |               |                                                |
| 9815WH | 1500              | 120/240 | 13.0/6.5   | 5120       | 10½                | 12½ | 3% | 11¾               | 14¾ | White Polymeric    |               |                                                |

**Project Packs.** To reduce jobsite damage, Broan Heaters can be ordered in project packs which feature housings packed separately from the finish kit. Install the housing and when drywall and painting is complete, add the heating element and grille.

\*Use Project Pack Model Number 83 Thermostat Kit with these models. \*\*Includes built-in thermostat.

**F and FT models** are factory wired at 500–750 Watts.