

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

CS40 / CS40B Multi-Turn Sweat Angle Stop w/ 5" Extension (Optional Loose Key)

Use: For use with water in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops.

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment protects accidental stop operation during rough-ins
- **Oval knurled handle** provides a secure grip and smooth on/off operation
-  **No Lead**

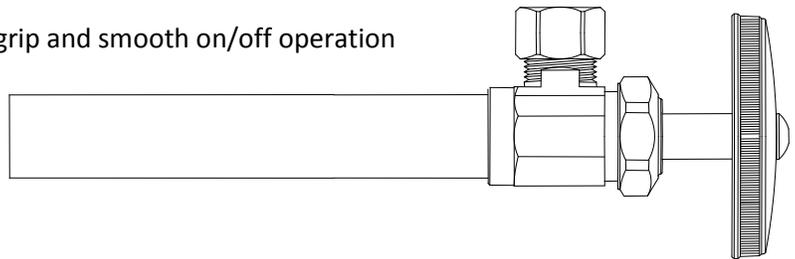

Operating Specifications:

Temperature: 40°- 140° F
Pressure: 125 PSI maximum

Standard

STOP MATERIAL SPECIFICATIONS	
Body	Brass or brass, plated
Stem	POM; brass; or brass, plated
Handle	Zinc die cast, plated; ABS, plated; or Polycarbonate
Handle Screw	Steel, zinc plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, plated
Compression Sleeve	Brass
Compression Nut	Brass or brass, plated

Compliant

STOP MATERIAL SPECIFICATIONS	
Body	Compliant brass or compliant brass, plated
Stem	POM; Compliant brass, or Compliant brass, plated
Handle	Zinc die cast, plated; ABS, plated; or Polycarbonate
Handle Screw	Steel, zinc plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, plated
Compression Sleeve	Brass
Compression Nut	Brass or brass, plated

Escutcheon	Steel, plated
Loose Key Adaptor	Brass or brass, plated
Loose Key	Zinc die cast
Lock Shield	Brass or brass, plated

Escutcheon	Steel, plated
Loose Key Adaptor	Compliant brass or Compliant brass, plated
Loose Key	Zinc, die cast
Lock Shield	Brass or brass, plated

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.




CS40 / CS40B Multi-Turn Sweat Angle Stop w/ 5" Extension (Optional Loose Key)

Standard Part Listing:

- CS40 C 1/2" nom sweat x 3/8" OD compression, chrome plated
- CS40B C 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated
- CS40B C1 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated, window box
- CS40B CD 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated, carded
- CS40BH R 1/2" nom sweat x 3/8" OD compression, no handle, bell escutcheon, rough brass
- CS40B BRL 1/2" nom sweat x 3/8" OD compression, bell escutcheon, polished brass PVD
- CS40B BZ 1/2" nom sweat x 3/8" OD compression, bell escutcheon, oil rubbed bronze
- CS40B NP 1/2" nom sweat x 3/8" OD compression, bell escutcheon, polished nickel
- CS40B NS 1/2" nom sweat x 3/8" OD compression, bell escutcheon, satin nickel
- SCS40 C 1/2" nom sweat x 3/8" OD compression w/loose key, chrome plated
- SCS40B C 1/2" nom sweat x 3/8" OD compression w/loose key, bell escutcheon, chrome plated
- SCS40B NS 1/2" nom sweat x 3/8" OD compression w/loose key, bell escutcheon, satin nickel

Compliant Part Listing :


- CS40X C 1/2" nom sweat x 3/8" OD compression, chrome plated
- CS40BX C 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated
- CS40BX C1 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated, window box
- SCS40X C 1/2" nom sweat x 3/8" OD compression w/loose key, chrome plated
- SCS40BX C 1/2" nom sweat x 3/8" OD compression w/loose key, bell escutcheon, chrome plated

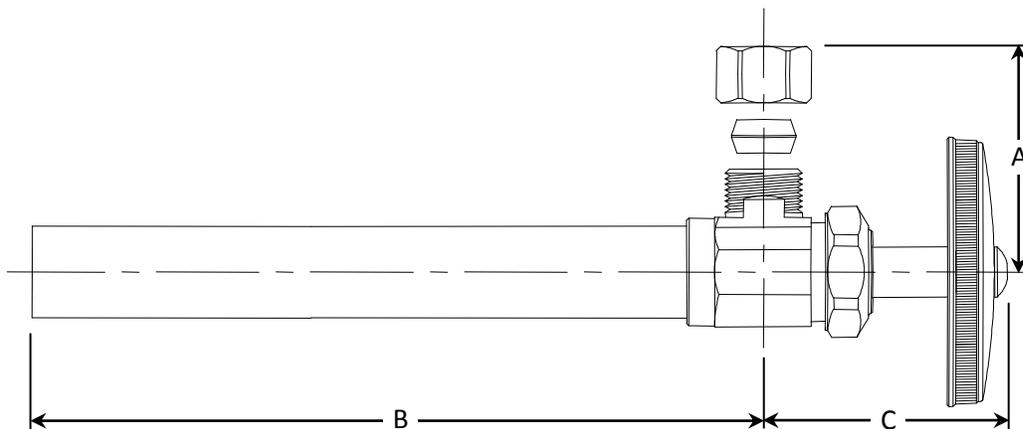

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®

CS40 / CS40B Multi-Turn Sweat Angle Stop w/ 5" Extension (Optional Loose Key)

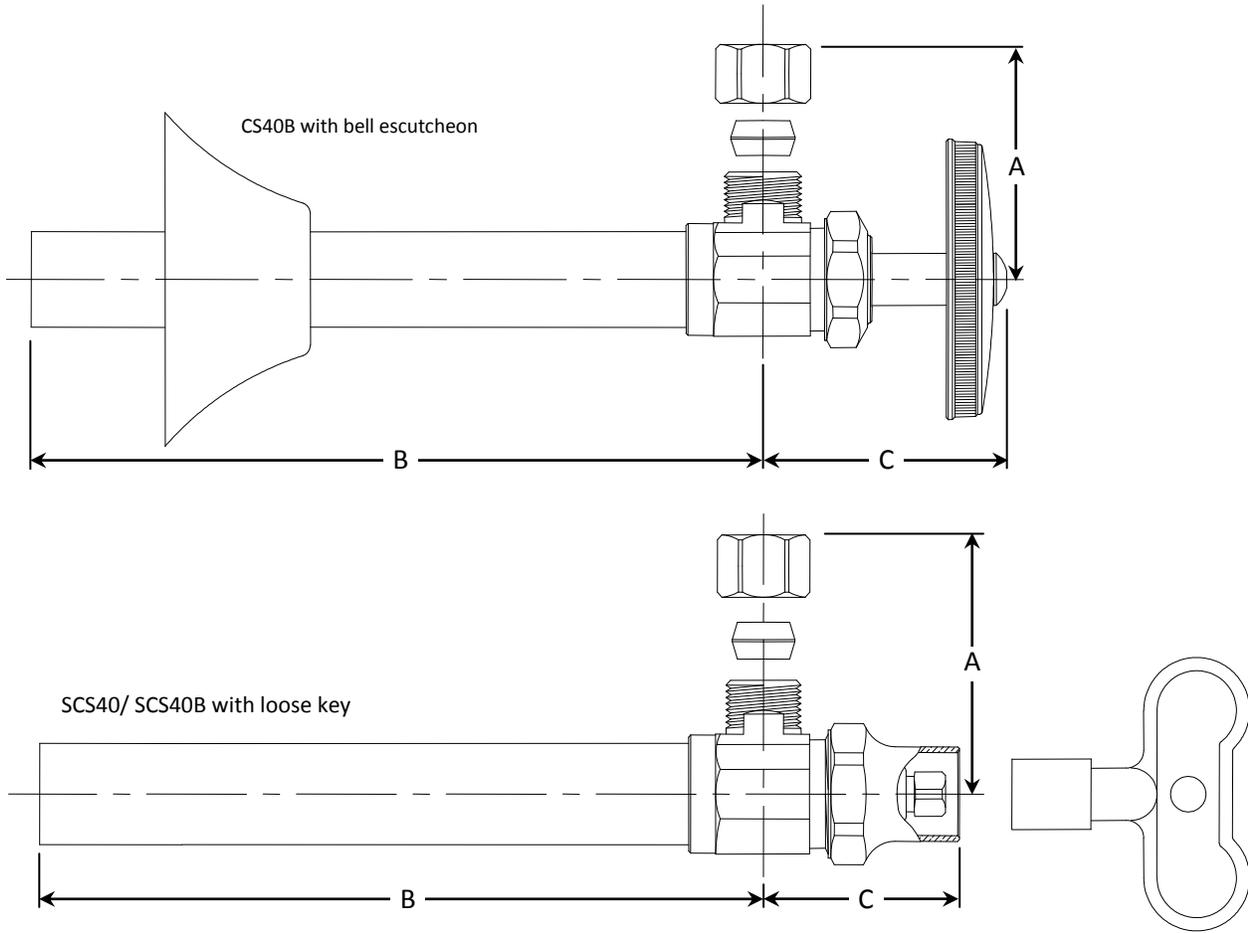

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
CS40	1.02	5.46	1.70
CS40B	1.02	5.46	1.70
CS40BH	1.02	5.46	1.70

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
SCS40	1.02	5.46	1.46
SCS40B	1.02	5.46	1.46

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®