

Wallplate families

Rugged design and quality materials make Arrow Hart wallplates the best choice

Whether faced with a commercial, institutional or industrial setting, you will find the desired material, configuration, style, size and color you need



Standard size

Wallplates for precision cuts




Mid-size and oversize

Wallplates for applications that require additional wall coverage



Extra depth

Wallplates to provide a flush fit to the wall when an old work outlet box is used



Specification grade thermoplastic

- Available in both nylon and polycarbonate constructions
- Virtually unbreakable plates reduce installation and replacement costs
- Preferred for industrial, institutional, and other high-traffic areas
- Exclusive time-saving screw catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil-resistant
- Available in standard size and mid-size configurations with screwless and pre-marked special use versions available




Specification grade metal wallplates

- Constructed of non-corrosive 302/304 stainless steel, brass or chrome
- Available in standard, mid-size, and oversize configurations with pre-marked special use versions available
- 302/304 Stainless is non-magnetic and non-corrosive for rugged durability
- Solid brass is coated with transparent lacquer to resist premature oxidation
- Shipped with removable protective film
- Recommended for industrial, institutional and commercial applications


Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


Standard

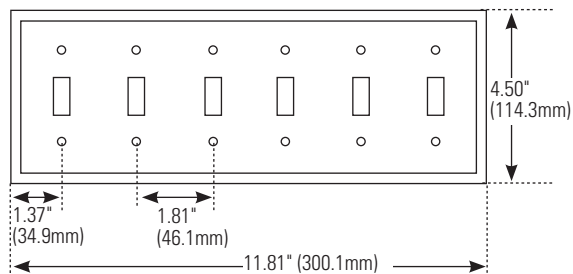


Mid-size

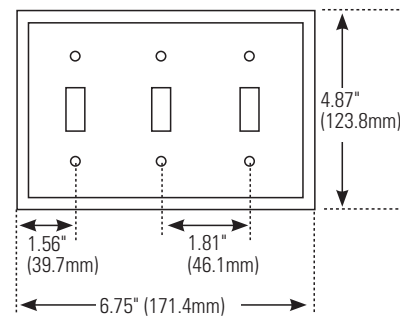

Oversize Mid-size Standard

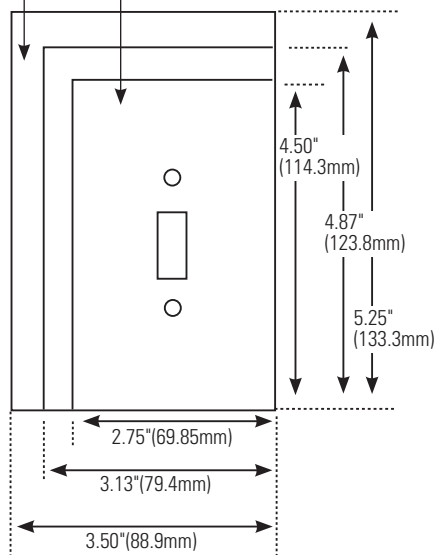

Oversize




Compliances, specifications and availability are subject to change without notice.

www.eaton.com
www.arrowhart.com

Mid-size screwless wallplates


Product description

1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang


2-Gang




3-Gang




4-Gang



5-Gang




6-Gang




1-Gang


2-Gang



3-Gang



4-Gang



1-Gang

Screwless decorator wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, GY, LA, V, W	□ PJS26__	✓
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	□ PJS262__	✓
3-Gang	Polycarbonate	A, BB, BK, LA, V, W	□ PJS263__	✓
4-Gang	Polycarbonate	A, BK, LA, V, W	□ PJS264__	✓
5-Gang	Polycarbonate	A, BK, LA, V, W	□ PJS265__	✓
6-Gang	Polycarbonate	A, BK, LA, V, W	□ PJS266__	✓

Toggle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	□ PJS1__	✓
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	□ PJS2__	✓
3-Gang	Polycarbonate	A, LA, V, W	□ PJS3__	✓
4-Gang	Polycarbonate	A, LA, V, W	□ PJS4__	✓

Duplex receptacle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	□ PJS8__	✓

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

A	B	BB	BK	GY	LA	V	W
(Almond)	(Brown)	(Brushed Bronze)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)

Certification information: Aspire series wallplates are cULus Listed to UL5154D, file no. E33216; ; PJ series wallplates are cULus Listed.

Specification information: K-22

Compliances, specifications and availability are subject to change without notice.

✓ RoHS compliant – Page Q-30

Wallplate specification & performance data

Wallplates

Product description

Standard size, mid-size, oversize

Wallplate sizes: standard size, mid-sized & oversize wallplates					CuVerro® Wallplate size: standard size
Material type	Thermoset	Nylon	Stainless steel	Polycarbonate	CuVerro® antimicrobial copper surfaces*
Manufacturing process	Injection molded	Injection molded	Stamped	Injection molded	Stamped
Testing & code compliance	<ul style="list-style-type: none"> • UL Listed to UL 514D, file no. E33216 • cUL Listed to C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> • UL Listed to UL 514D, file no. E33216 • cUL Listed to C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> • UL Listed to 514D, file no. E92003 • CSA certified to C22.2, no. 42.1 	<ul style="list-style-type: none"> • UL Listed to UL 514D, file no. E33216 • cUL, UL file E33216 certified to C22.2, no. 42.1 	<ul style="list-style-type: none"> • UL Listed to UL514D, file no. E92003 • CSA certified to C22.2, no. 42.1 • CuVerro® antimicrobial copper EPA registration number 85353-5 (9000CUR series) and 85353-3 (9000CU series)
Environmental specifications	Flammability: Meets UL94 requirements; 5VA rated Temperature rating: -40°C to 90°C (-40°F to 194°F)	Flammability: Meets UL94 requirements; 5VA rated Temperature rating: -40°C to 70°C (-40°F to 158°F)	Flammability: N/A Temperature rating: -40°C to 70°C (-40°F to 158°F)	Flammability: Meets UL94 requirements 5VA rated Temperature rating: -40° to 70° C(-40°F to 158°F)	Flammability: N/A Temperature rating: -40°C to 70°C (-40°F to 158°F)
Materials	Body: 0.080" thick thermoset urea or phenolic Inner wallplate: N/A	Body: 0.060" thick thermoplastic Inner wallplate: N/A	Body: 0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance Inner wallplate: N/A	Body: 0.08" thick thermoplastic polycarbonate Inner wallplate: 0.071" thick polycarbonate (PJS Series)	Body: 0.040" thick CuVerro® antimicrobial copper alloy, 99.5% containing copper, nickel, iron, manganese, zinc, and 0.05% lead Inner wallplate: N/A

Footnote:

*Laboratory testing shows that, when cleaned regularly, CuVerro® antimicrobial copper surfaces kill greater than 99.9% of the following bacteria within 2 hours of exposure: MRSA, Staphylococcus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli O157:H7. CuVerro® antimicrobial copper surfaces are a supplement to and not a substitute for standard infection control practices and have been shown to reduce microbial contamination, but do not necessarily prevent cross contamination; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. CuVerro® is a registered trademark of GBC Metals, LLC and is used with permission, CW-0013-1207.

Compliances, specifications and availability are subject to change without notice.