

ULTRA-ZONE®

Forced Air Zone Controls

MODEL ND Series Dampers

Construction-
Heavy Duty extruded aluminum.

Nylon Bearings for quiet operation.

Overlapping parallel blades for low leakage.

Power open/Power closed.

Designed to operate at static pressures up to 1.5"
w/ less than 5% Leakage.



UL Listed Motor Actuator is a 24vac 3 wire power
open/power close type rated at 18"lbs. of torque.

NEMA1 Rated Housing.

End-Stops for Min/Max Travel Adjustments.


LED's Indicate damper position.

Available in 8" x 6" thru 30" x 30" in one inch
increments. Custom Sizes can be manufactured,
contact EWC Controls Inc.

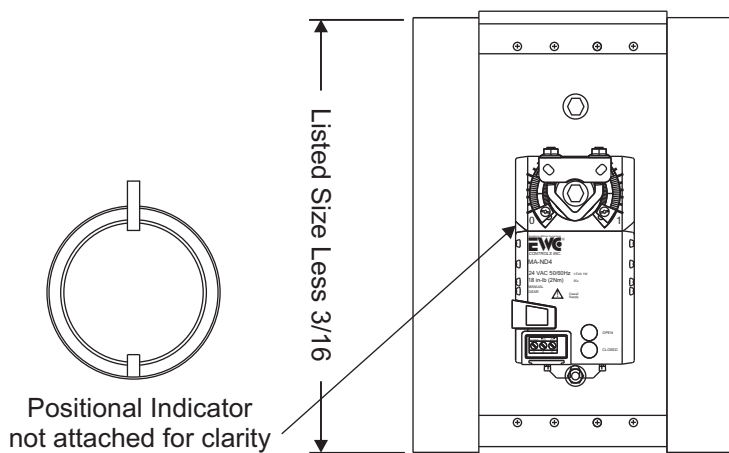
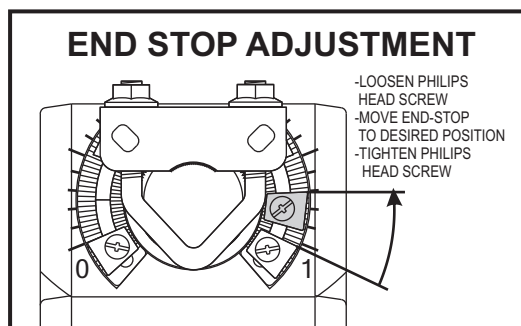


SUBMITTAL SHEET

Model ND
w/ MA-ND4 Actuator

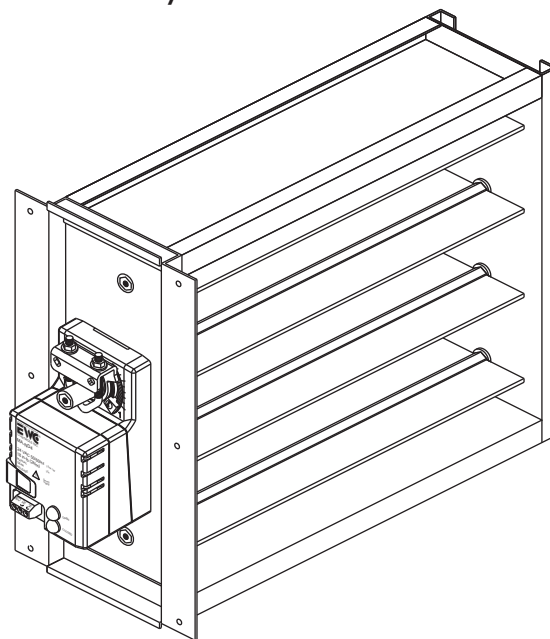

DIMENSIONAL
DRAWINGS

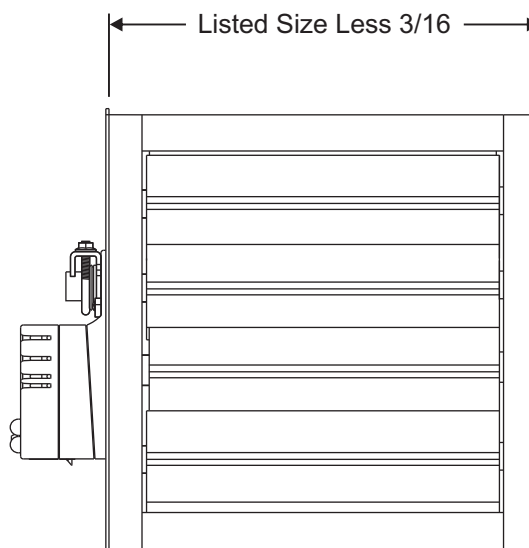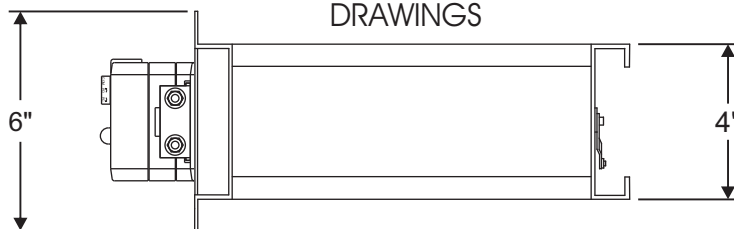

SUBMITTAL FORM

SUBMITTED BY: _____

JOB: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____

Excellence Without Compromise

EWC®
CONTROLS INC.

385 Hwy. 33
Englishtown, NJ 07726
Ph: 800-446-3110
Fx: 732-446-5362

P/N 090377A0071 REV. L

Copyright © EWC Controls 2005-2008 All Rights Reserved

Insertion Mounting

Cut a 4" slotted opening in one side of the duct and slide the damper in. Secure the damper to the duct with the supplied sheet metal screws. Larger sizes may require additional support by securing the back of the damper as well. If using duct board, additional support can be obtained by using Model DBA Duct Board Adaptors.


**If flush wall mounting is required, cut the flanges off of the front mounting plate.*

WIRING SOLUTIONS


MOTOR Terminal Output

M6 - Power to Close (PC)
M4 - Power to Open (PO)
M2 - Constant Power (HOT)
M1 - Common (COM)

Wiring to a Control Panel

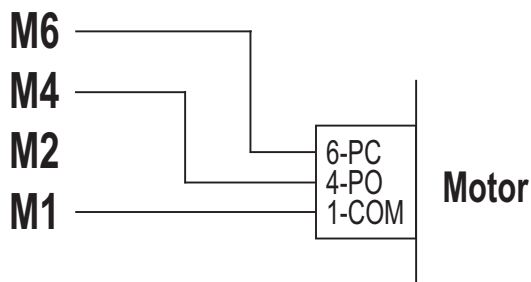

Wiring a Thermostat to Control a Single Damper

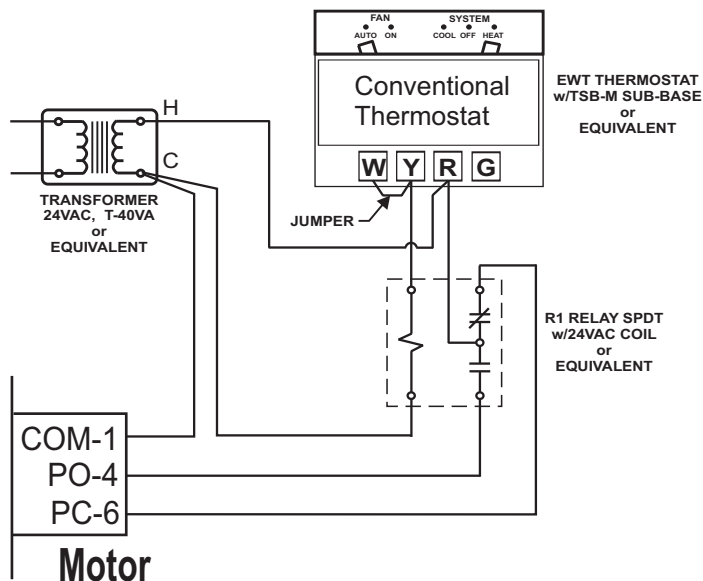

Wiring in Parallel

