


CONDUIT INTERLOCKING SPACERS


Intermediate Vertical-Lok Spacers



Kraloy conduit interlocking spacers are available in a variety of spacing dimensions for all conduit sizes. Our most popular sizes are offered with unique rebar holder slots for quick reinforcing bar installation and the bases have support holes for securing the base spacers to the trench bottom.

Kraloy conduit spacers manufactured with the rebar holder slots can accommodate a maximum rebar diameter of 5/8" for the 2" conduit size and 7/8" for all other conduit size spacers. All conduit spacers provide a 3" clearance from the trench base to the bottom of the first conduit.

Kraloy recommends the installation of a spacer every 5 to 6 feet along the raceway length to provide the proper and even support of the conduit assembly.

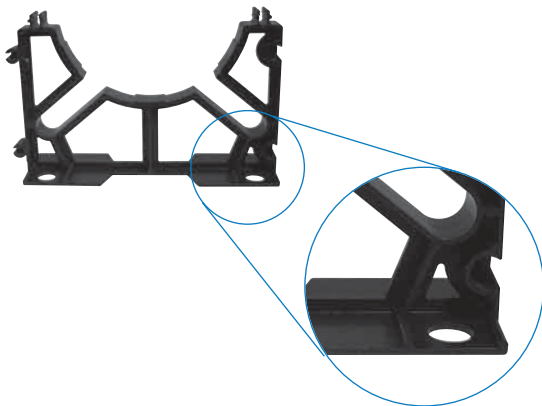

Size (in.)	Part Number	Product Code
2 x 1-1/2	IV2015	029550
2 x 2	IV2020	029551
2 x 3	IV2030	029552
* 3 x 1-1/2	IV3015	029553
3 x 2	IV3020	029554
3 x 3	IV3030	029555
* 4 x 1	IV4010	029556
4 x 1-1/2	IV4015	029557
4 x 2	IV4020	029558
4 x 3	IV4030	029559
* 5 x 1-1/2	IV5015	029560
5 x 2	IV5020	029561
5 x 3	IV5030	029562
6 x 1-1/2	IV6015	029563
6 x 2	IV6020	029564
6 x 3	IV6030	029565
* 8 x 2	IV8020	029294

* Do not have rebar slots or base holes

Base Vertical-Lok Spacers

Size (in.)	Part Number	Product Code
2 x 1-1/2	BV2015	029566
2 x 2	BV2020	029567
2 x 3	BV2030	029568
* 3 x 1-1/2	BV3015	029569
3 x 2	BV3020	029570
3 x 3	BV3030	029571
* 4 x 1	BV4010	029572
4 x 1-1/2	BV4015	029573
4 x 2	BV4020	029574
4 x 3	BV4030	029575
* 5 x 1-1/2	BV5015	029576
5 x 2	BV5020	029577
5 x 3	BV5030	029578
6 x 1-1/2	BV6015	029579
6 x 2	BV6020	029580
6 x 3	BV6030	029581
* 8 x 2	BV8020	029293

* Do not have rebar slots or base holes