

ACT-4 AC Electronically Commutated Spherical Motor Centrifugal Pump Kit



Application:
Specifically designed for hot water recirculation in a residential or light commercial building.

Specifications:

Pump:

- Max Capacity: 2.5 GPM
- Max Head: 5.5 ft.
- Pipe Connections: 3/4" M / F NPT
- Maximum Working Pressure: 145 PSI
- Maximum Temperature: 203°F

Motor:

- Canned Spherical Motor
- Voltage 115 Volt 50/60 HZ
- Power 20 Watts
- Automatic Overload Protection
- Low In-Rush Current

Valve:

- Pipe Connections: 1/2" MNPT x 3/8" compression
- Maximum Working Pressure: 145 PSI
- Maximum Temperature: 203°F
- Two AA Alkaline Batteries
- Maximum Transmitter Range: 150 ft.

Features

Compact Design:

Close coupled, space saving design provides easy installation.

Mounting:

Pump can be mounted horizontally or vertically with motor end down.

Construction:

Wetted parts are brass, 316SS, thermoplastic, carbon and ceramic for superior corrosion resistance.

Ceramic Bearing Ball and Carbon Bearing Cap:

High density ceramic bearing ball and graphite impeller bearing cap designed for high efficiency and long life.

Impeller:

Highly efficient and dynamically balanced with carbon bearing for smooth ultra quiet operation.

Casing:

Casing is lead free brass construction.

Mechanical Seal:

Unique patented design has no mechanical seal thus eliminating a potential leak path.

Motor:

Highly efficient and ultra quiet spherical motor design. Pump is designed for continuous operation. All ratings are within working limits of the motor.

Electronics:

Embedded microprocessor control is self-regulating and available with variable speed dial control (potentiometer) on the pump or as an optional PWM input for OEM.

Noise level:

Whisper quiet, less than 40 db.

Weight:

Lightweight construction weighs less than 2 lbs.


Laing Thermotech - ACT-4 Recirculation Kit

Materials of Construction (Wetted Parts)


Part	Materials
Housing	Brass
"O" Ring	EPDM or Viton
Impeller	Polyphenylene Oxide (PPO)
Bearing	Carbon/Aluminum Ceramic
All Other Wetted Parts	316 Stainless Steel

Model Number	Part Number	Connection
ACT-4 kit	6050E4050	Pump: 3/4" M/F NPT Valve: 1/2" MNPT x 3/8" compression
push button/ signal repeater	6099E1550	Standard 115V Power Outlet

Performance Curve

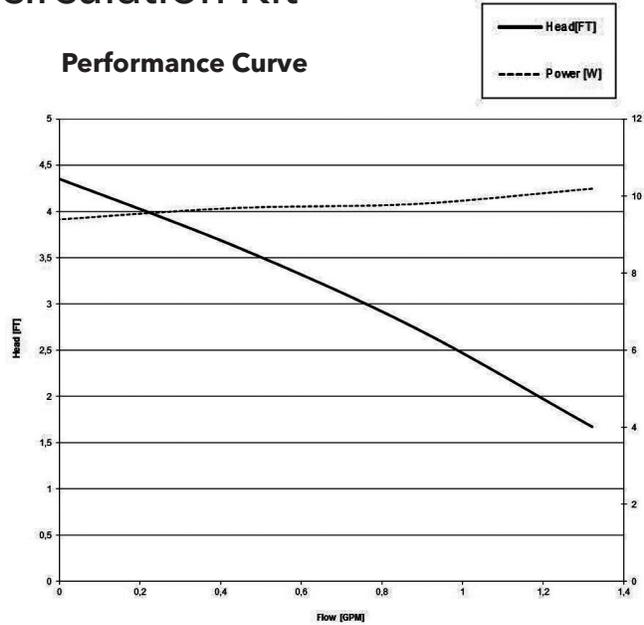

Dimension Inches (mm)											Shipping WT. LBS. (kg)
A	B	C	D	E	F	G	W	X	Y	Z	
4.84 (123)	6.87 (174.6)	4.47 (113.5)	1.97 (50.1)	2.93 (74.4)	4.74 (120.5)	2.68 (68)	3.5 (89)	1.1 (28)	0.87 (22)	5.45 (138.5)	3.9 (1.8)

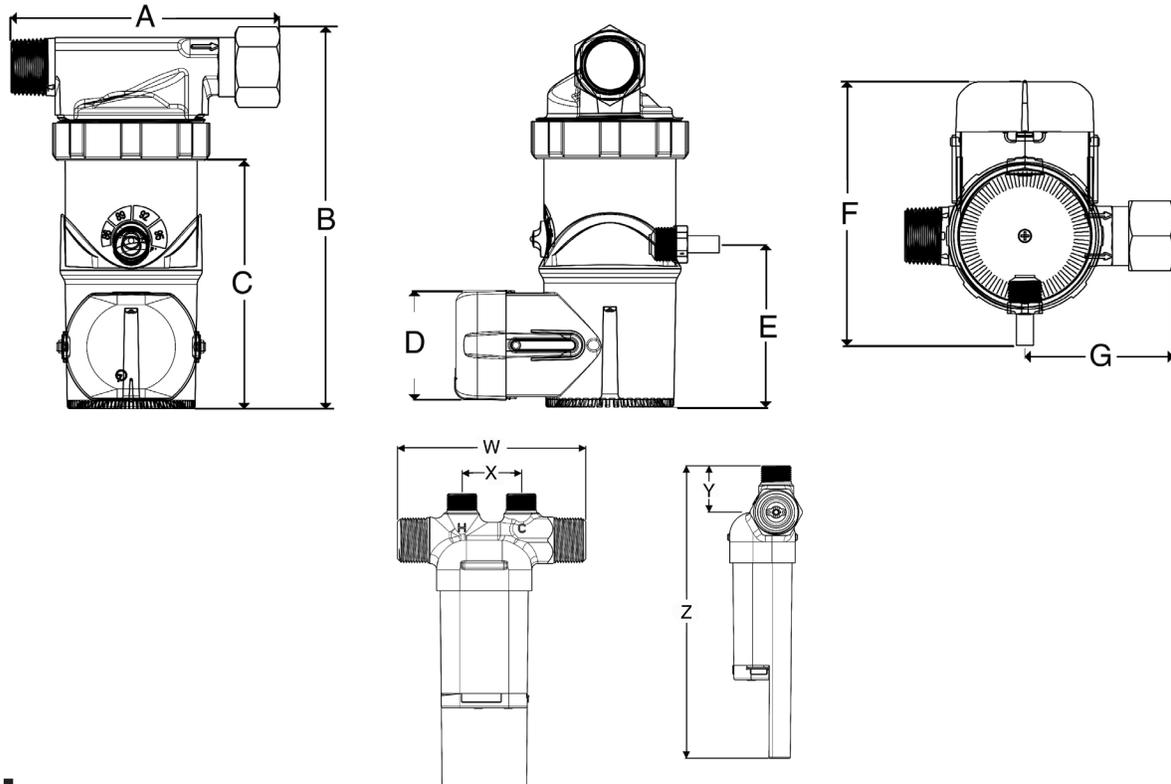

xylem
Let's Solve Water

Xylem Inc.
3878 S. Willow, Suite 104
Fresno, CA 93725
Tel: (559) 265-4730 (800) 554-6853
Fax: (559) 265-4740 (800) 453-7523
www.lainginc.com

Laing Thermotech is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc. SS-20 October 2013