

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

ABS BACKWATER VALVE

Model S-660

Stepped body design promotes efficient flow
Access cap allows ease of clean-out or repair
Flapper and cap O-ring create a positive seal against sewer gasses
Manufactured in an ISO 9002 accredited facility
Manufactured using 100% virgin resin
Designed for DWV installations operating at pressure less than 50 psi
Please contact Legend if testing or operating pressures will exceed 50 psi

UPC/IAPMO and IPC Listed:

File number 4790

Manufactured in compliance with
ASME A112.14.1-2003

End connections comply with ASTM
D2665




MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	ABS	ASTM D3965
2 Flapper	ABS	ASTM D3965
3 Flapper o-ring	NBR	Commercial grade
4 Access cap	ABS	ASTM D3965
5 Access cap o-ring	NBR	Commercial grade

DIMENSIONS- WEIGHTS

Size	A	B
1-1/2"	4.19	3.88
2"	4.50	3.88
3"	7.37	6.00
4"	10.75	6.75
6"	15.13	10.13

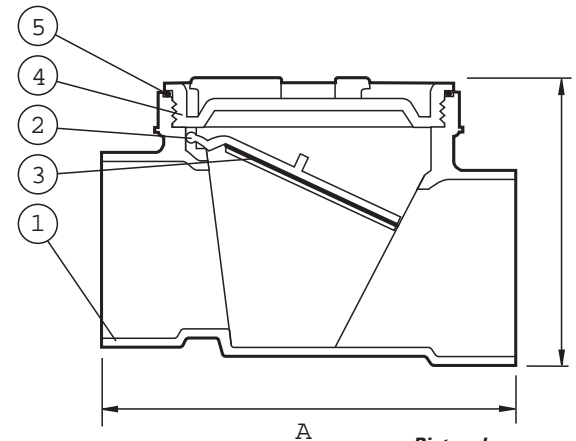

**Pictured
S-660
Cut-away**