



- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter tub spout

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ\text{F}$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- **ADA**  for lever handle


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## METHOD™ POSI-TEMP® Single-Handle Tub/Shower Trim Kit

**Models:** T2801 series - valve trim only  
T62801 (Bulk Packed 12 per carton)  
T2802 series - shower trim only  
T62802 (Bulk Packed 12 per carton)  
T2803 series - tub/shower trim  
T62803 (Bulk Packed 12 per carton)

**Valves:** 62300 series  
2500 series

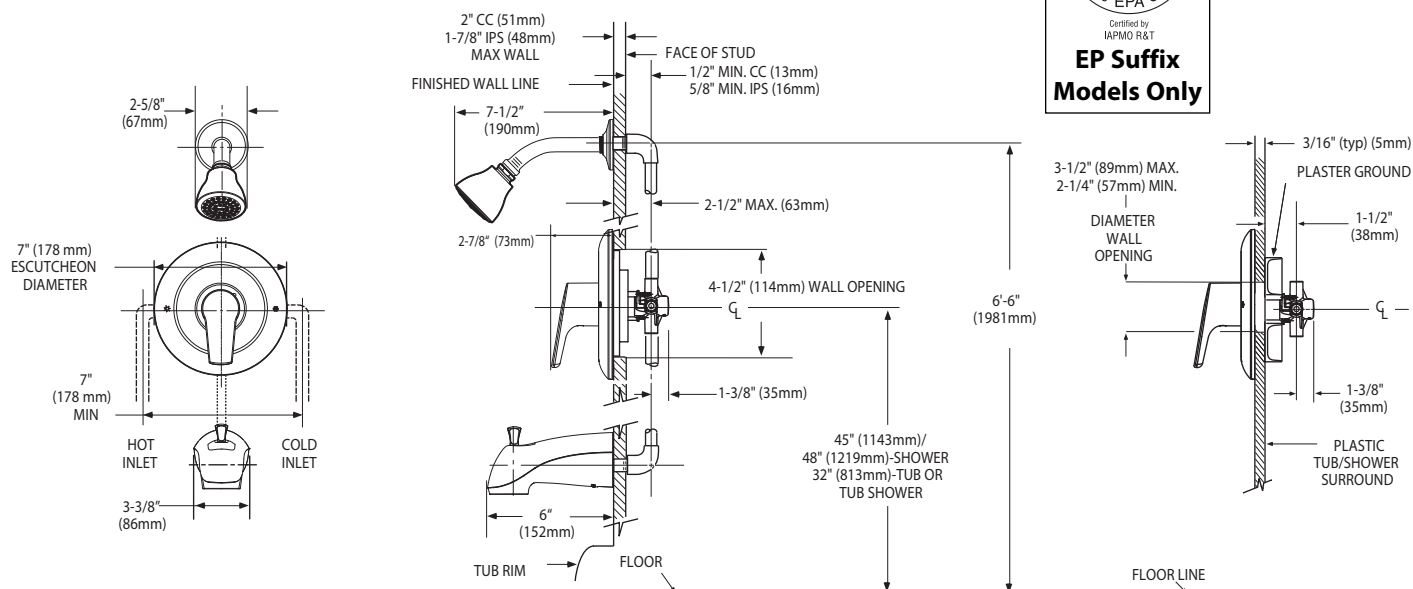

## THICK WALL APPLICATION

### THIN WALL APPLICATION

## CRITICAL DIMENSIONS

(DO NOT SCALE)