





WIRE MANAGEMENT

Terminal Blocks

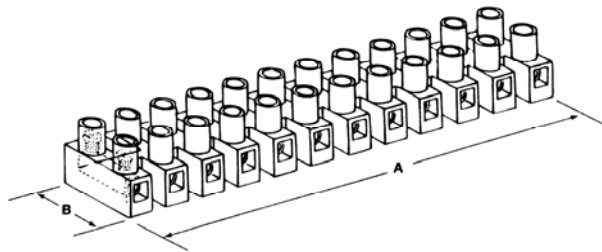

- Touchproof Recessed screws and tubular contacts provide added safety and helps prevent short circuits
- Tubular contacts connect stripped, un-terminated solid or stranded wire directly to each contact
- Integrated stainless steel spring wire protectors prevent twisting and breakage of stranded wire during connection
- Modular 12-circuit design can be cut into smaller sections, or stacked end-to-end
- Dead front design to prevent shorts
- Rugged nylon 66 housing, UL 94V2
- Operating temperature rated at 230°F(110°C)
- Brass metal alloy, nickel plated terminal insert
- Zinc plated, yellow chromed screws
- Can be used for AC & DC

Measurement = inches

Cat No.	Amp	Volts	Wire Range	A	B	C	D	E	F	Bag Qty	Each Block
Header Card - 2 Pack											
22152	20	300	22-12	3.79	.669	.570	.315	.114	.110	2	
22154	30	300	22-10 Sol 22-12 Str	4.62	.795	.670	.394	.142	.134	2	
22156	35	300	22-10	5.54	.937	.748	.472	.154	.154	2	
22158	50	300	20-8	6.22	1.008	.992	.531	.173	.189	2	
Bag - 10 Pack											
22052	20	300	22-12	3.79	.669	.570	.315	.114	.110	10	
22054	30	300	22-10 Sol 22-12 Str	4.62	.795	.670	.394	.142	.134	10	
22056	35	300	22-10	5.54	.937	.748	.472	.154	.154	10	
22058	50	300	20-8	6.22	1.008	.992	.531	.173	.189	10	