


Type _____
-60
P8008 ☐

Catalog No.	Finish White Glass, Non-Metallic Flange	Dimensions (Inches)	
		A	B
P8008	-60	7-3/4	5-3/16

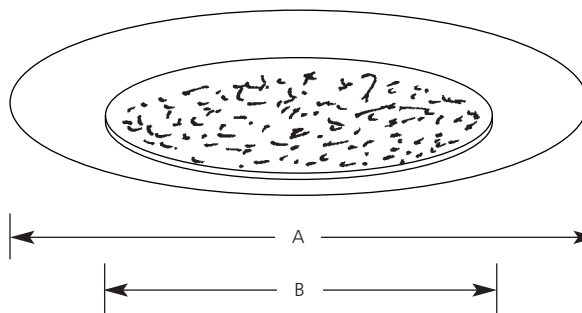

Lamp Wattage		
Housing	IC	Non-IC
P87-AT	N/A	60A19, 75wPAR30 SN
P87-ATQC	N/A	60A19, 75wPAR30 SN
P187-TG	N/A	60A19, 75wPAR30 SN

Specifications:

Flange

- Bright white molded in color
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position

Lens

- Flat Albalite glass: 5-7/16" dia. x 3/32" ht.

Labels

- UL-CUL wet location listed

P87-AT

P87-AT WITH P8008-60

Report No. 98192

No. Lamps: 1 Type Lamp: 60A19-GE Total Lumens: 865

Fixture Efficiency: 10.9%




S/MH Ratio: 1.3

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 110°			Beam Angle - 65°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.1	16	1.1	0.5	7
10	0.1	22	0.6	0.3	10
12	0.0	27	0.4	0.2	12
14	0.0	33	0.2	0.1	15
16	0.0	39	0.2	0.1	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

Quick Calculator Charts

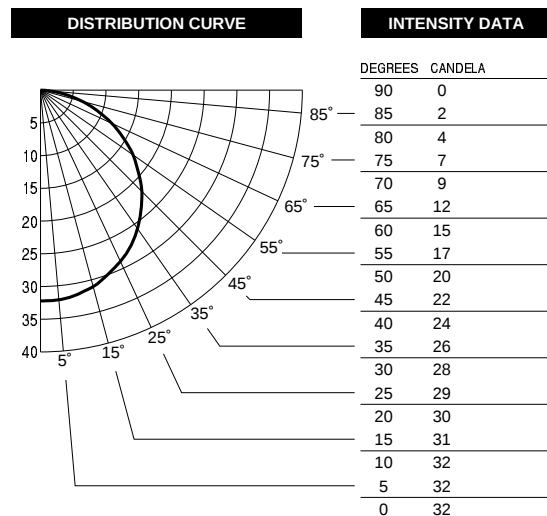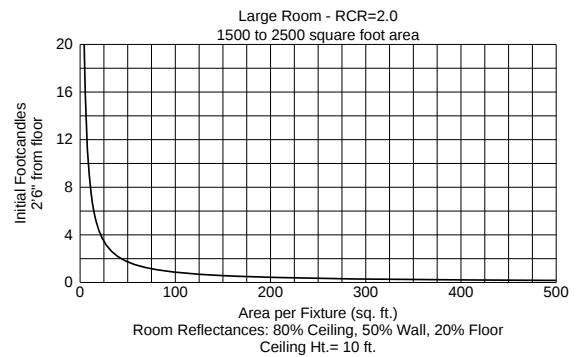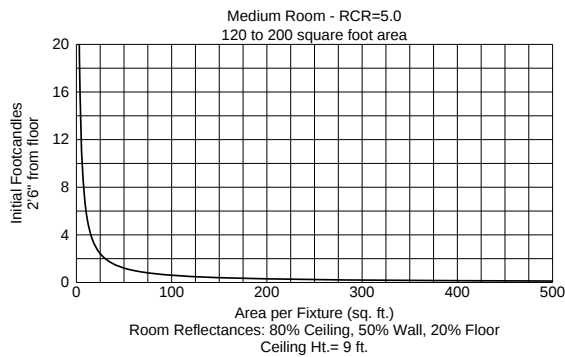

ZONAL CAVITY COEFFICIENTS OF UTILIZATION																					
Effective Floor Cavity Reflectance 0.20																					
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
0	13	13	13	13	13	13	13	13	12	12	12	12	12	12	11	11	11	11	11	11	
1	12	11	11	10	11	11	11	10	11	10	10	10	10	10	10	9	9	9	9	9	
2	11	10	9	8	10	10	9	8	9	9	8	9	8	8	8	8	8	8	7	7	
3	10	9	8	7	9	8	8	7	8	7	7	8	7	7	7	7	7	7	6	6	
4	9	8	7	6	9	7	7	6	7	6	6	7	6	6	7	6	6	6	5	5	
5	8	7	6	5	8	7	6	5	6	6	5	6	5	5	6	5	5	5	5	5	
6	8	6	5	4	7	6	5	4	6	5	4	6	5	4	5	5	4	4	4	4	
7	7	6	5	4	7	5	5	4	5	4	4	5	4	4	5	4	4	4	4	4	
8	7	5	4	3	6	5	4	3	5	4	3	5	4	3	5	4	3	3	3	3	
9	6	5	4	3	6	5	4	3	4	4	3	4	4	3	4	4	3	3	3	3	
10	6	4	3	3	6	4	3	3	4	3	3	4	3	3	4	3	3	3	3	3	

P87-AT

P87-AT WITH P8008-60

Report No. 98181

No. Lamps: 1 Type Lamp: 75PAR30L/FL Total Lumens: 990

Fixture Efficiency: 33.4%




S/MH Ratio: 1.3

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 110°			Beam Angle - 65°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.4	16	3.7	1.9	7
10	0.2	22	2.0	1.0	9
12	0.1	27	1.3	0.6	12
14	0.1	33	0.9	0.4	15
16	0.1	39	0.6	0.3	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

Quick Calculator Charts

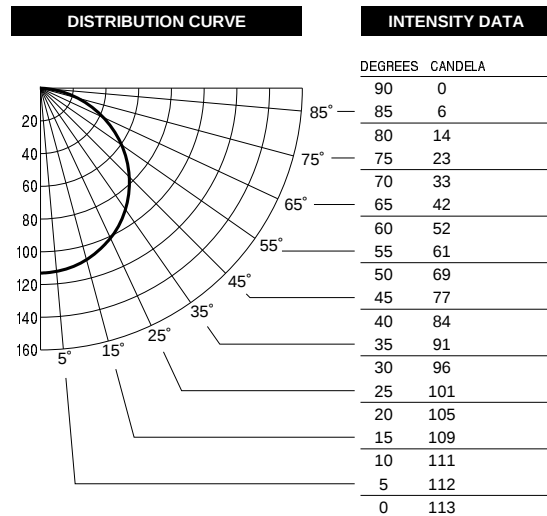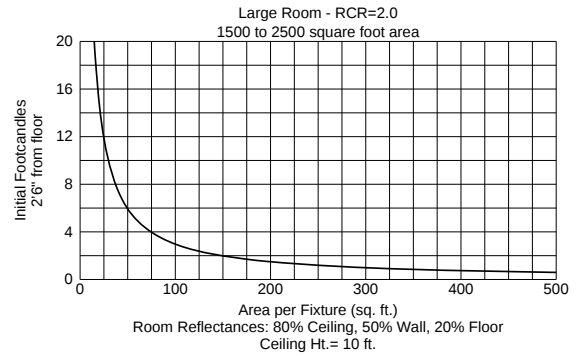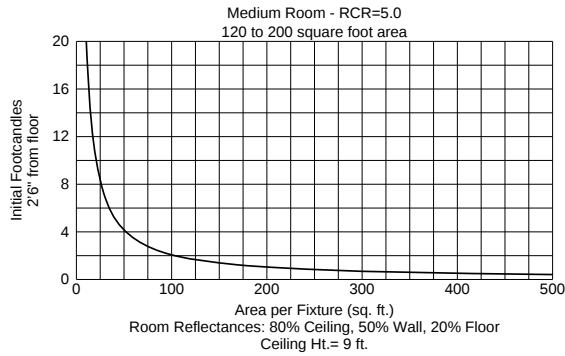

ZONAL CAVITY COEFFICIENTS OF UTILIZATION																				
Effective Floor Cavity Reflectance 0.20																				
RC	80				70				50				30			10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	40	40	40	40	39	39	39	39	37	37	37	36	36	36	34	34	34	34		
1	36	35	33	32	35	34	33	31	33	31	30	31	30	30	30	29	29	28		
2	33	30	28	26	32	30	27	26	28	27	25	27	26	24	26	25	24	23		
3	30	26	24	21	29	26	23	21	25	23	21	24	22	21	23	22	20	19		
4	28	23	20	18	27	23	20	18	22	20	18	21	19	18	21	19	17	17		
5	25	21	18	16	25	21	18	16	20	17	15	19	17	15	19	17	15	14		
6	23	19	16	14	23	18	16	14	18	15	13	17	15	13	17	15	13	12		
7	22	17	14	12	21	17	14	12	16	14	12	16	13	12	15	13	12	11		
8	20	16	13	11	20	15	13	11	15	12	11	14	12	11	14	12	10	10		
9	19	14	11	10	18	14	11	10	14	11	10	13	11	9	13	11	9	9		
10	18	13	10	9	17	13	10	9	13	10	9	12	10	9	12	10	9	8		




Compact Fluorescent

**6" Flat Albalite Shower Light
with Reflector
IC & Non-IC**

Recessed

Type _____
-60
P8008 ☐

Catalog No.	Finish	Dimensions (Inches)	
	White Glass, Non-Metallic Flange	A	B
P8008	-60	7-3/4	5-3/16

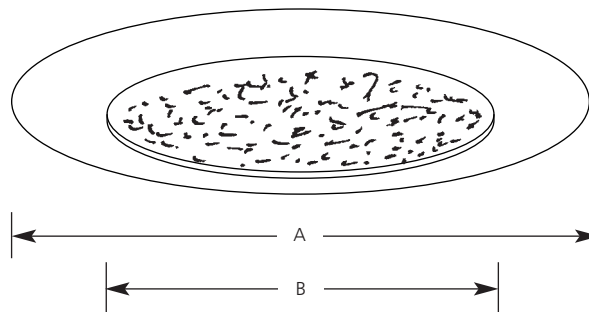

Lamp Wattage

Housing	IC	Non-IC
P83-AT	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF
P83-ICAT	13w 4-pin Quad/Triple-tube CF	13w 4-pin Quad/Triple-tube CF
P88-ICAT	18w 4-pin Quad/Triple-tube CF	18w 4-pin Quad/Triple-tube CF
P183-EB	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF

Specifications:

Flange

- Bright white molded in color
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position

Lens

- Flat Albalite glass: 5-7/16" dia. x 3/32" ht.

Labels

- UL-CUL wet location listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com
Patent# 5,758,960

Rev. 7/09

P83

P83 WITH P8008-60

Report No. 98041

No. Lamps: 1 Type Lamp: 13W QUAD CF - GE Total Lumens: 860

Fixture Efficiency: 7.9%




S/MH Ratio: 1.3

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 110°			Beam Angle - 65°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.1	16	0.8	0.4	7
10	0.0	21	0.4	0.2	10
12	0.0	27	0.3	0.1	12
14	0.0	33	0.2	0.1	15
16	0.0	39	0.1	0.1	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

Quick Calculator Charts

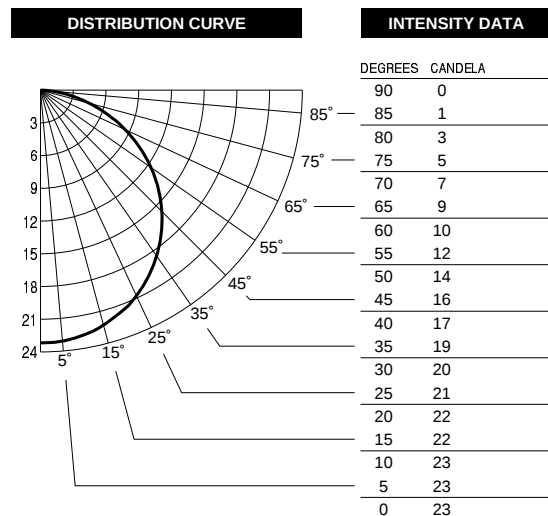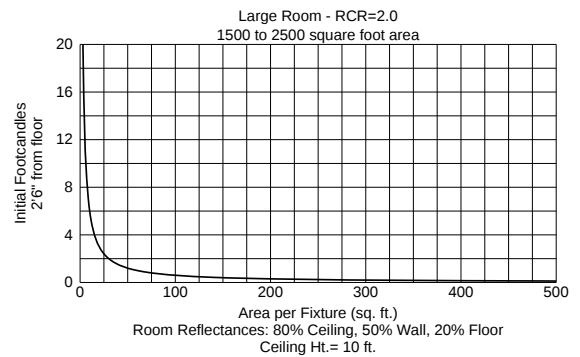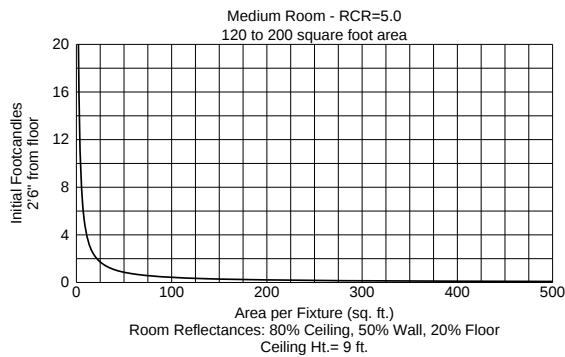

ZONAL CAVITY COEFFICIENTS OF UTILIZATION																				
Effective Floor Cavity Reflectance 0.20																				
RC	80				70				50				30				10			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0	9	9	9	9	9	9	9	9	9	9	9	8	8	8	8	8	8	8	8	8
1	9	8	8	8	8	8	8	7	8	7	7	7	7	7	7	7	7	7	7	7
2	8	7	7	6	8	7	6	6	7	6	6	6	6	6	6	6	6	6	6	5
3	7	6	6	5	7	6	6	5	6	5	5	6	5	5	5	5	5	5	5	5
4	6	6	5	4	6	5	5	4	5	5	4	5	5	4	5	4	4	4	4	4
5	6	5	4	4	6	5	4	4	5	4	4	5	4	4	4	4	4	4	4	3
6	5	4	4	3	5	4	4	3	4	4	3	4	4	3	4	3	3	4	3	3
7	5	4	3	3	5	4	3	3	4	3	3	4	3	3	4	3	3	4	3	3
8	5	4	3	2	5	4	3	2	3	3	2	3	3	2	3	3	2	3	3	2
9	4	3	3	2	4	3	3	2	3	3	2	3	3	2	3	3	2	3	3	2
10	4	3	2	2	4	3	2	2	3	2	2	3	2	2	3	2	2	3	2	2