


Type _____
 -28
 P8367WL ☐

Catalog No.	Finish White	Dimensions (Inches)	
		A	B
P8367WL	-28	6-1/8	4-5/8

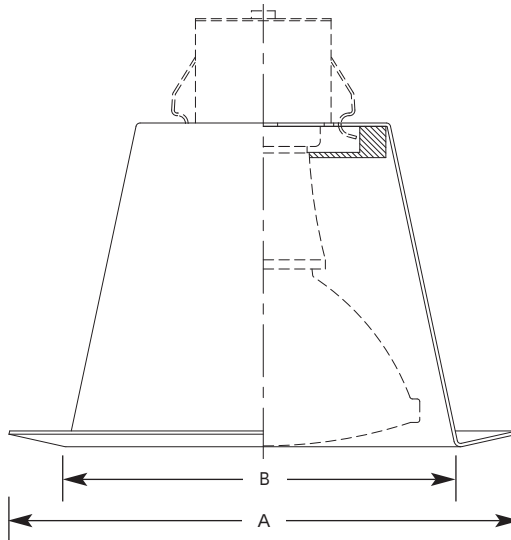

Lamp Wattage*

Housing	IC	Non-IC
P84-AT	50PAR30	50PAR30
P85-AT	50PAR30	50PAR30
P85-TG	N/A	50PAR30
P85-FB	N/A	50PAR30
P184-TG	50PAR30	50PAR30

Specifications:

Flange

- Bright white powder painted integral metal flange
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- All aluminum construction
- Socket mounts to trim for optimum performance and consistent lamp position
- Positive upward spring action forces trim to fit snugly against the ceiling
- Splay design optimally accommodates long neck Par30 lamps, but will accept short neck PAR30 lamps

- Adhesive backed, high-temperature acrylic gasket is placed on interior top portion of reflector to prevent the passage of water into socket

Labels

- UL-CUL wet location listed
- Rated IC and Non-IC

Photometrics

- Refer to PAR30 Lamp Application Data

*Use only outdoor rated par lamps.