



Job Name:		Item Number:	
Specifier Name:		Sales Agency:	
Specifier Contact:		Agency Contact:	
Fixture Type:		Comments:	
Quantity:		Approval:	

12V 2" High Output LED Module 3000K



L: 2" W: 7/8" H: 5/8"

Description

The miniature, high output LED modules can be used with 12 volt Ambiance Lx Cable Systems powered by magnetic low-voltage or **zero-load** electronic low-voltage transformers. Ambiance High Output LED Modules are dimmable on magnetic and electronic low voltage systems. For magnetic systems, a magnetic low voltage (MLV) dimmer should be used. For electronic, an electronic low voltage (ELV) dimmer is recommended.

Specifications

Item Number	98701S-986
Finish	Tinted Aluminum
Dimensions	L: 2" W: 7/8" H: 5/8"
Min. Spacing	3" on center
Diffuser	Acrylic - Frosted
Voltage	12V
Color Temperature	3000°K
Lumens	70
Watts Consumed	1.5 watts
Efficacy	46.7 lm/w
Color Rendering	>85 CRI
Rated Average Life	50,000 hours to 70%
Safety Listing	cETL Listed for Damp Locations
Warranty	5-Year Limited Warranty

Instruction Sheets

- Trilingual (English, Spanish, and French) (990LXLEDMOD)


Available Photometry

- LM79 Photometry and Integrating Sphere Test (2700K)
- IES File (2700K)

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	98701S-986	1	785652218620	2.4	1.18	1.25	0.002	0.1	Yes
Master Pack	98701S-986	5	10785652218627	6.25	1.25	2.4	0.011	0.3	Yes
Shipping Master	98701S-986	200	20785652218624						

Component Diagram:

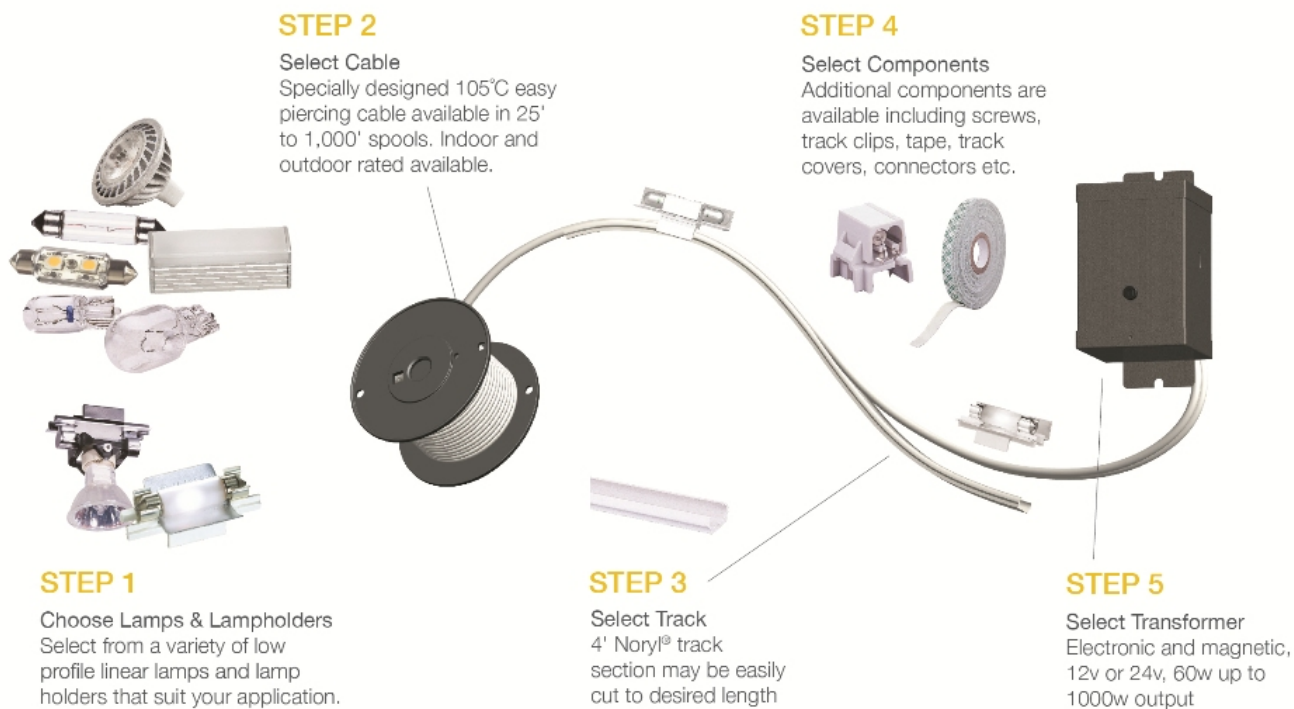

AMBIANCE
Lighting Systems

7400 Linder Ave. | Skokie, Illinois 60077 | 800-347-5483
© 2013 Sea Gull Lighting LLC, a Generation Brands Company.