


FESTOON LAMPHOLDERS

For use with our highly specified LED and xenon festoons, Ambiance Lx Festoon Lampholders feature a high quality reflector and base for directing light where you need it. Choose from our Accent Task Socket for general applications that require crisp linear lighting or our Adjustable Lampholder for a wider diffused beam of light. Each lampholder snaps onto Lx Track and Cable with ease and can be spaced based on your criteria.

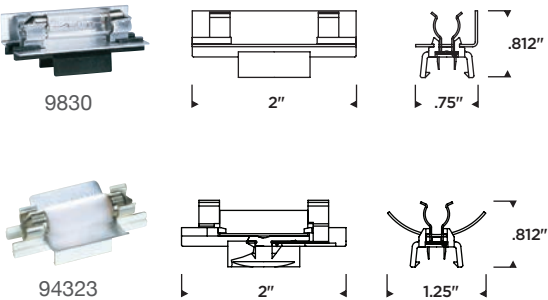

NOTE: After selecting lamp source and lampholder, proceed to page 56 to select cable.


ITEM NUMBER	9830(-xx)	94323(-xx)
REFLECTOR	"L" Accent Task Socket	Adjustable Wide Beam
VOLTAGE	12v and 24v AC	
LAMP BASE	Festoon	
CERTIFICATION	cETL, damp rated	
MAX. WATTAGE	(1) 10w Xenon Festoon (1) LED Festoon	
RECOMMENDED MIN. SPACING	2" on center (5w Xenon) 4" on center (LED Festoon)	
MATERIAL / FINISH	(-12) Black and (-15) White Heat resistant polycarbonate base and anodized aluminum reflector	

APPLICATION GUIDE

APPLICATION	RECOMMENDED SPACING ON CENTER	SUGGESTED LAMP SOURCE(S)
Above Cabinet	6" - 12"	LED Festoon
Under Cabinet	2" - 6"	LED Festoon
Inside Cabinet	1 - 2 per shelf	LED Festoon
Toe Space	4"	LED Festoon
Showcase	4" - 6"	LED Festoon
Cove	2" - 6"	LED Festoon

Choose either Method "A" or "B" for even illumination on a vertical surface where cove lighting is desired. These easy to use spacing guidelines assure even vertical illumination when the suggested spacing and distances are followed.


Method A: Lighting system installed on angled surfaces.
Method B: Lighting system installed on horizontal (flat) surfaces.

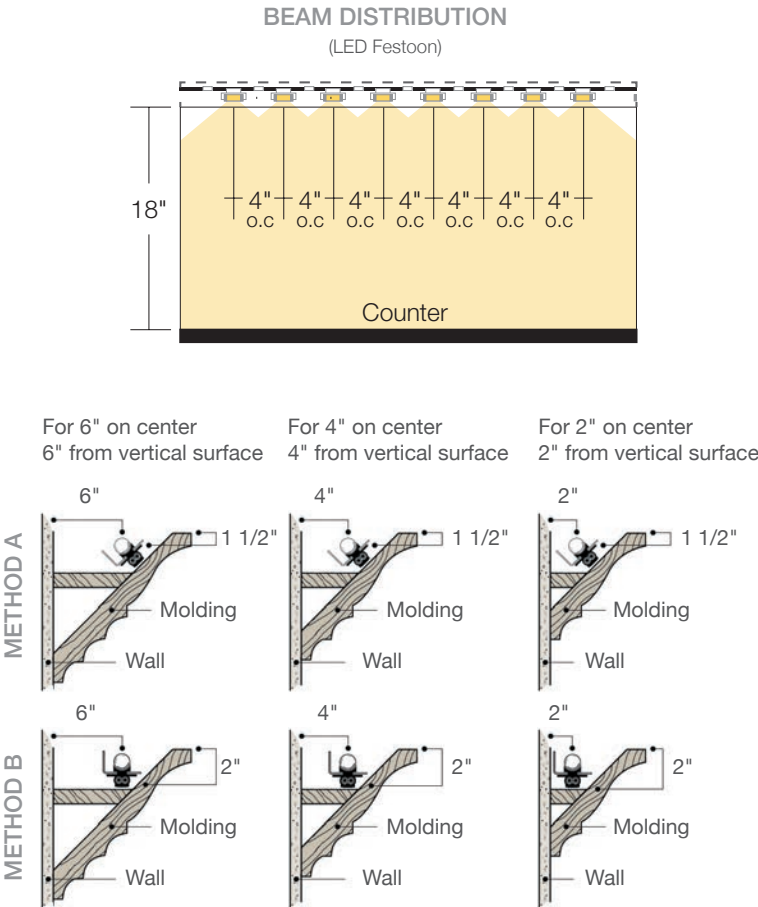

CHOOSE A LAMP & LAMPHOLDER

FESTOON LAMPHOLDERS

For use with our highly specified LED and xenon festoons, Ambiance Lx Festoon Lampholders feature a high quality reflector and base for directing light where you need it. Choose from our Accent Task Socket for general applications that require crisp linear lighting or our Adjustable Lampholder for a wider diffused beam of light. Each lampholder snaps onto Lx Track and Cable with ease and can be spaced based on your criteria.

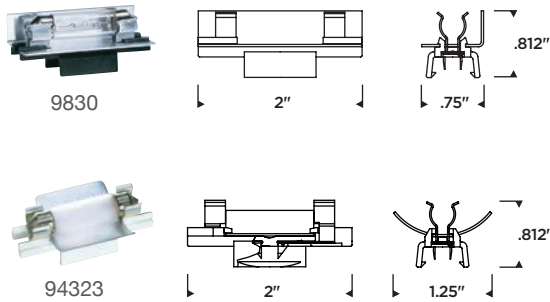**NOTE:**


After selecting lamp source and lampholder, proceed to page 56 to select cable.

ITEM NUMBER	9830(-xx)	94323(-xx)
REFLECTOR	"L" Accent Task Socket	Adjustable Wide Beam
VOLTAGE	12v and 24v AC	
LAMP BASE	Festoon	
CERTIFICATION	cETL, damp rated	
MAX. WATTAGE	(1) 10w Xenon Festoon (1) LED Festoon	
RECOMMENDED MIN. SPACING	2" on center (5w Xenon) 4" on center (LED Festoon)	
MATERIAL / FINISH	(-12) Black and (-15) White Heat resistant polycarbonate base and anodized aluminum reflector	

APPLICATION GUIDE

APPLICATION	RECOMMENDED SPACING ON CENTER	SUGGESTED LAMP SOURCE(S)
Above Cabinet	6" - 12"	LED Festoon
Under Cabinet	2" - 6"	LED Festoon
Inside Cabinet	1 - 2 per shelf	LED Festoon
Toe Space	4"	LED Festoon
Showcase	4" - 6"	LED Festoon
Cove	2" - 6"	LED Festoon

BEAM DISTRIBUTION
(LED Festoon)

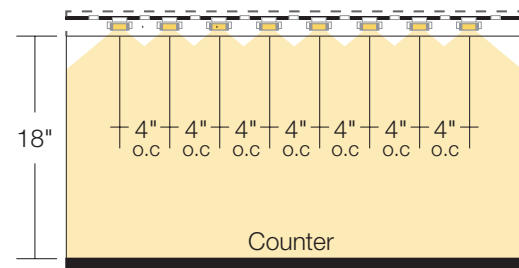

Choose either Method "A" or "B" for even illumination on a vertical surface where cove lighting is desired. These easy to use spacing guidelines assure even vertical illumination when the suggested spacing and distances are followed.

Method A: Lighting system installed on angled surfaces.

Method B: Lighting system installed on horizontal (flat) surfaces.

