

DOUBLE-DUTY DRIVE HOOK

» 555 SERIES

TwinTalon™

SPECIFICATION

Sioux Chief's 555 TwinTalon™ CTS tube fasteners shall be used where necessary to secure CTS tube in piping system. Fastener shall be 100% corrosion proof and U.V. resistant. Fastener shall be impact resistant to 0°F, and be able to withstand continuous temperatures up to 160°F. Fastener shall be compatible with copper, PEX or CPVC tube.

INSTALLATION

Fastener shall be secured to any building structure and in accordance with plumbing code. Fastener shall snap onto CTS tube for easy installation, and shall allow for expansion and contraction of tube with less noise. Fastener shall be designed to avoid tube damage if nail is overdriven.

MATERIALS

Fastener body: high density black polyethylene; 100% corrosion proof; U.V. resistant; impact resistant to 0°F; max temp: 160°F continuous

Nail: rust resistant; zinc plated yellow irradiate; continuous rink shank

Screw: rust resistant, zinc-plated Phillips pan head, self-drilling tip


SAFE WORKING LOAD

21 lbs.


DIMENSIONS

A: width	1.525"
B: height	1.02"
C: depth	0.4"
D: tube size	1/2"–3/4" CTS

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

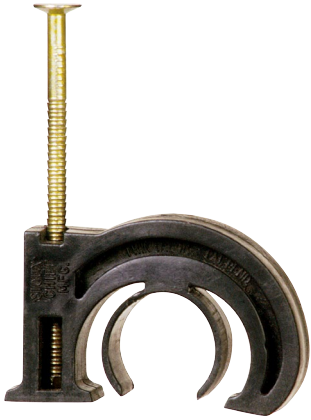

555-23

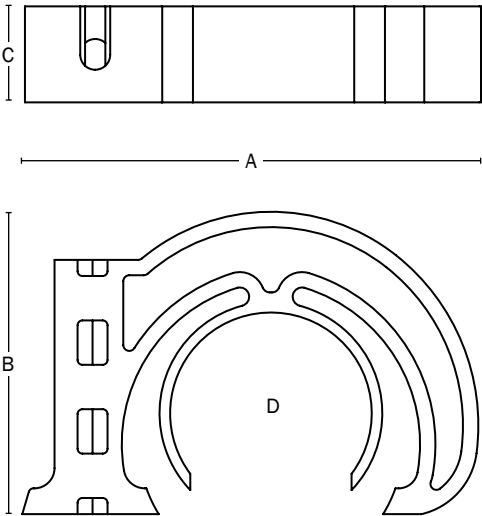

Create Item Number

555-23A

e.g. 555-23S: 1/2" CTS – 3/4" CTS TwinTalon with screw

FASTENER A

_ = nail (leave blank)

S = screw