

SPECIFICATIONS

Notes:

1. 4" FPT inlet/outlet with 3" and 4" plain end fittings.
2. Unit weight - 49 lbs. (wet weight 216 lbs.)
3. Maximum operating temperature: 150° F continuous
4. Capacities - Liquid: 20 gal.
Grease: 130 lbs. (17.8 gal.) @35 GPM
Grease: 127 lbs. (17.3 gal.) @50 GPM
Grease (99% - at least 2 units in series): 180 lbs. (24.7 gal.) @35 GPM
Solids: 1.8 gal.
5. Built-in flow control.
6. For gravity drainage applications only.
7. Do not use for pressure applications.
8. Cover placement allows full access to tank for proper maintenance.
9. Vent not required unless per local code.
10. Engineered inlet and outlet diffusers are removable to inspect/clean piping.
11. Integral air relief / anti-siphon.
12. Designed for indoor, on-floor, below-grade or low-profile under sink installations.

ENGINEER SPECIFICATION GUIDE


Schier Great Basin™ grease interceptor model # GB2 shall be lifetime guaranteed and made in USA of seamless, rotationally-molded polyethylene with minimum 5/16" uniform wall thickness. Interceptor shall be furnished for above or below grade installation. Interceptor shall be certified to ASME A112.14.3 (type C) and CSA B481.1, with field cut riser system, built-in flow control and three outlet options. Interceptor flow rate shall be 35 or 50 GPM. Interceptor grease capacity shall be 130 lbs. @ 35 GPM or 127 lbs. @ 50 GPM. Cover shall provide water/gas-tight seal and have minimum 450 lbs. load capacity.

CERTIFIED PERFORMANCE


Great Basin™ hydromechanical grease interceptors are third party performance-tested and listed by IAPMO to ASME #A112.14.3 and CSA B481.1 grease interceptor standards and greatly exceed requirements for grease separation and storage. They are compliant to the Uniform Plumbing Code, the National Standard Plumbing Code, the National Plumbing Code of Canada, and the International Plumbing Code.




Satisfies Miami DERM 99% efficiency requirements when at least 2 units are installed in series. Product labels are permanently attached to inside and outside of unit for easy viewing.

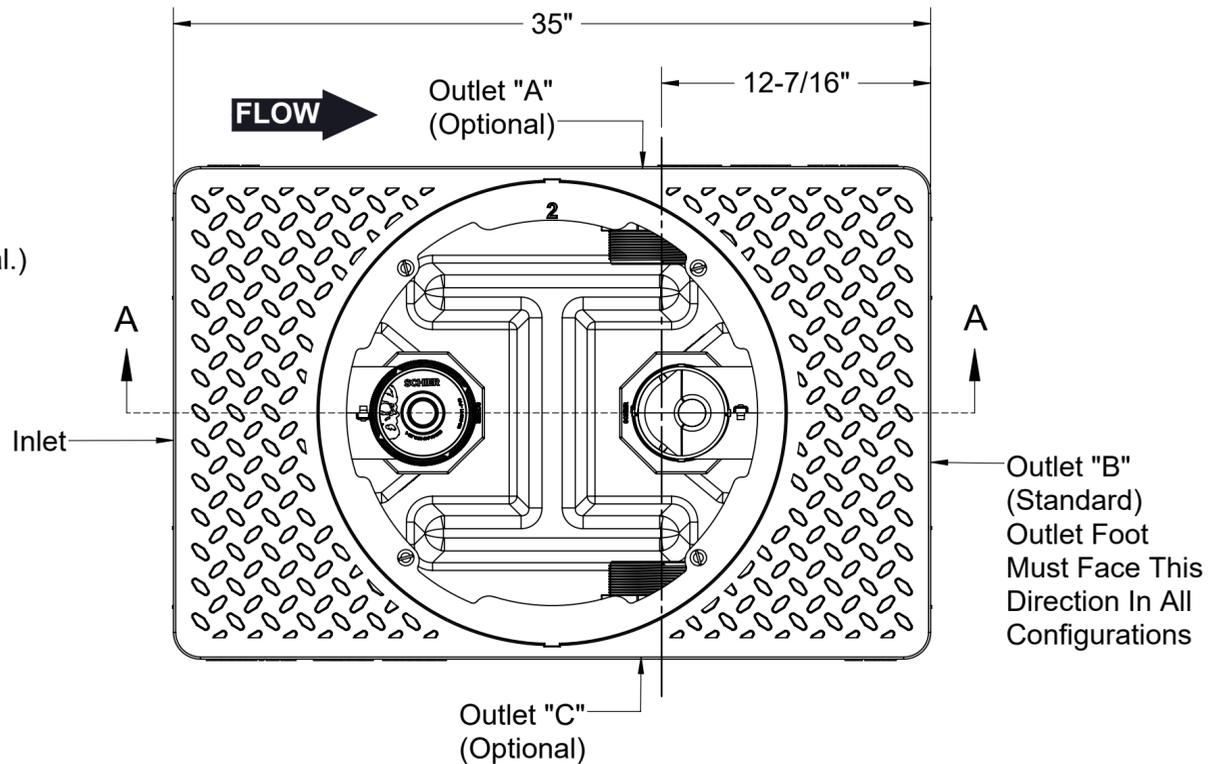


TOP VIEW
(COVER REMOVED FOR CLARITY)

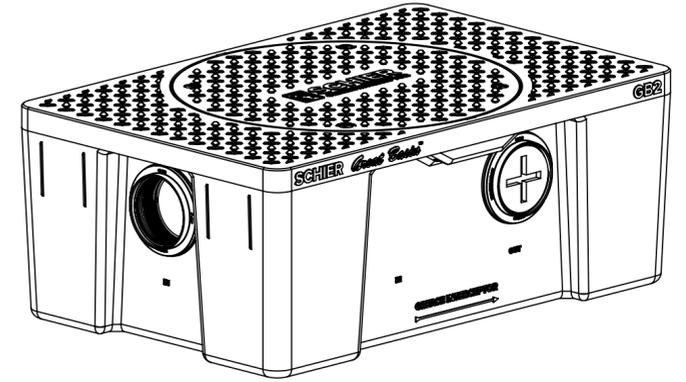

ISOMETRIC VIEW

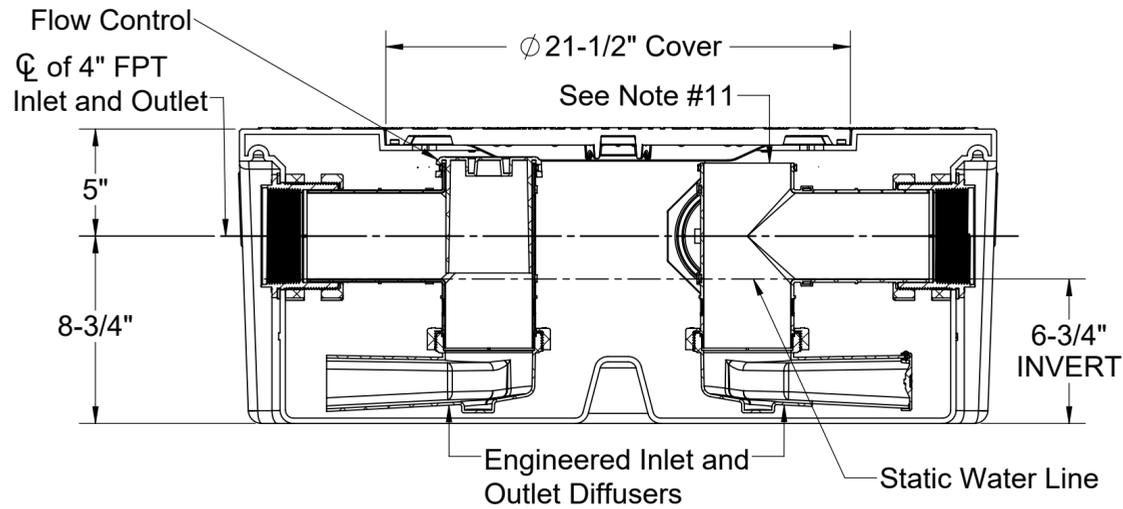


SECTION A-A

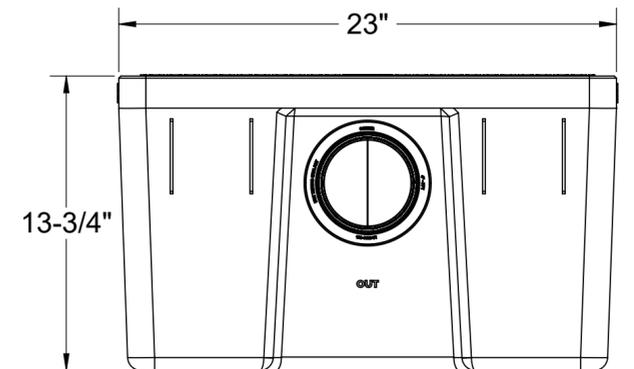

END VIEW

SPECIFICATION SHEET

MODEL NUMBER:	PART NUMBER: 4065-001-05
GB2	DESCRIPTION: GB2 GREASE INTERCEPTOR 35 GPM / 50 GPM, 4" FPT INLET/OUTLET, WITH 3" AND 4" PLAIN END FITTING ADAPTERS AND PEDESTRIAN RATED COVER
<small>PROPRIETARY AND CONFIDENTIAL</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SCHIER PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SCHIER PRODUCTS IS PROHIBITED.</small>	
DWG BY: C.SINCLAIR	DATE: 5/5/2022
REV: -	ECO: -

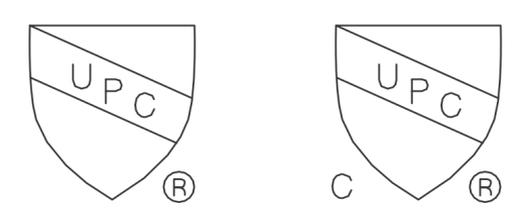

SCHIER

6455 Woodland Dr
Shawnee, KS 66218
Tel: 913-951-3300
Fax: 913-951-3399
schierproducts.com