


You have come to know Siemens solutions for their durability, innovation, and safety attributes. This continues with the plug-on neutral load center with electronic breakers to provide a more secure connection resulting in a more confident installation.

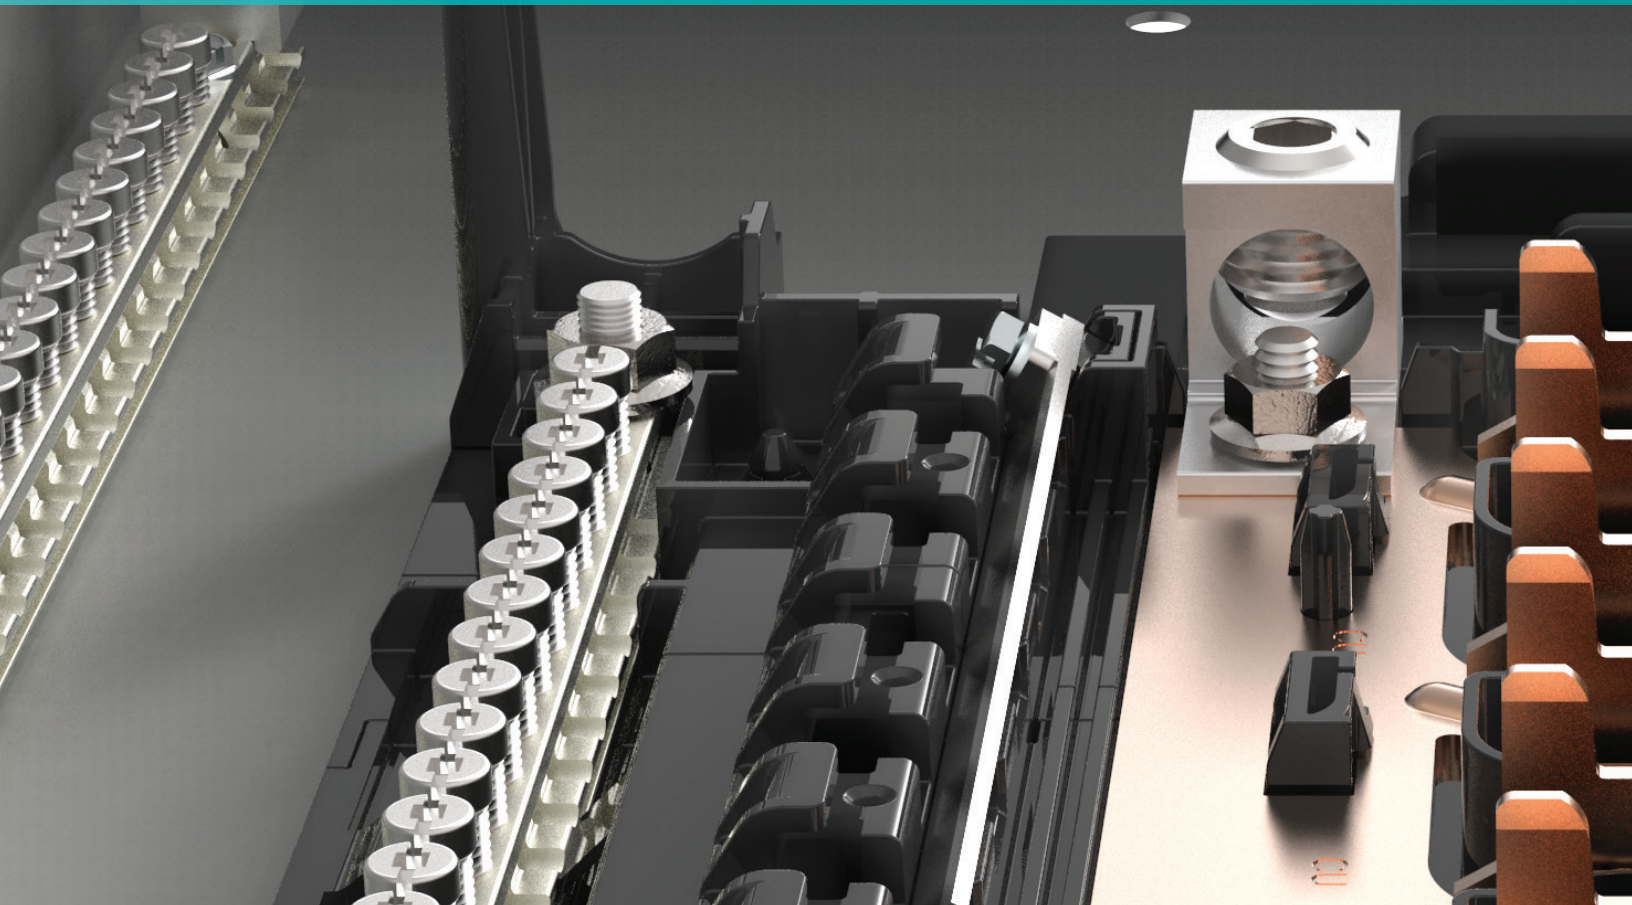

Simple Spacious Secure

- Quicker breaker installation
- Wiring made easier with the neutral lug removed on CAFCI breakers
- Same great features as PL and ES load centers
- Small electronic breaker footprint
- Design allows for neutral terminal accessibility
- Over 4 inches of wire bending space
- Same reliable installation method
- Neutral clip is the same as line side
- Durable hook-rail

A Siemens Advantage

SN Series 1-phase Main Lug Plug-On Neutral Load Centers ④

1-phase, 3-wire, 120/240 Volts AC

Main Lug Load Centers
100-225 Amperes

Aluminum Bus
60/75°C Rated

| Amp Rating | No. of Spaces | No. of Circuits | Indoor Enclosure - NEMA Type 1 | | Outdoor Enclosure - NEMA Type 3R | |
|------------|---------------|-----------------|--------------------------------|-----------------------------|----------------------------------|-----------------------------|
| | | | Catalog Number | Enclosure Height (inches) ① | Catalog Number | Enclosure Height (inches) ② |
| 125 | 12 | 12 | SN1212L1125 | 18 | SNW1212L1125 | 21 |
| 125 | 12 | 24 | SN1224L1125 | 18 | SNW1224L1125 | 21 |
| 125 | 16 | 32 | SN1632L1125 | 21 | SNW1632L1125 | 21 |
| 125 | 20 | 20 | SN2020L1125 | 21 | – | – |
| 125 | 20 | 40 | SN2040L1125 | 21 | SNW2040L1125 | 23 |
| 125 | 24 | 24 | SN2424L1125 | 24 | SNW2424L1125 | 27 |
| 125 | 24 | 48 | SN2448L1125 | 24 | – | – |
| 125 | 30 | 48 | SN3048L1125 | 26 | SNW3048L1125 | 29 |
| 125 | 40 | 40 | SN4040L1125 | 30 | – | – |
| 150 | 16 | 32 | SN1632L1150 | 21 | – | – |
| 150 | 20 | 40 | SN2040L1150 | 24 | SNW2040L1150 | 27 |
| 150 | 24 | 48 | SN2448L1150 | 26 | – | – |
| 200 | 8 | 16 | – | – | SNW0816L1200T ③ | 23 |
| 200 | 12 | 24 | SN1224L1200 | 21 | SNW1224L1200 | 21 |
| 200 | 20 | 40 | SN2040L1200 | 26 | SNW2040L1200 | 27 |
| 200 | 24 | 48 | SN2448L1200 | 26 | – | – |
| 200 | 30 | 30 | SN3030L1200 | 30 | – | – |
| 200 | 30 | 48 | SN3048L1200 | 30 | SNW3048L1200 | 29 |
| 200 | 40 | 40 | SN4040L1200 | 36 | SNW4040L1200 | 35 |
| 225 | 12 | 24 | – | – | SNW1224L1225 | 21 |
| 225 | 40 | 60 | SN4060L1225 | 36 | – | – |
| 225 | 42 | 64 | SN4264L1225 | 36 | SNW4264L1225 | 38 |
| 225 | 54 | 82 | SN5482L1225 | 42 | – | – |

① Indoor enclosures are 14 1/4" wide by 3 7/8" deep.

② Outdoor enclosures are 14 1/2" wide by 4 1/4" deep.

③ Feed-thru lugs.

④ Available (made to order) in white by adding "W" to the end of the catalog number.