

**For Commercial & Residential Applications**

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_


Representative \_\_\_\_\_

**Metal Continuous Wastes - Center Outlet**



- Supplied with Baffle Tee



Slip Joint Type

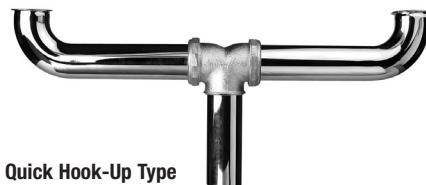

Quick Hook-Up Type

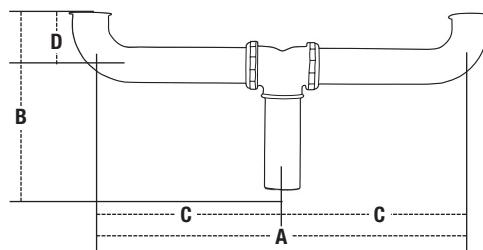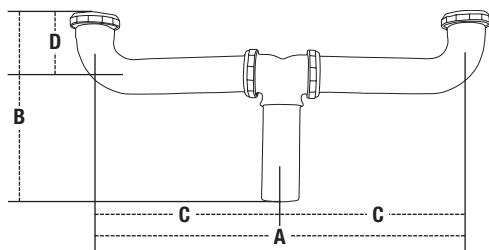

MODEL	✓ TO SUBMIT	DESCRIPTION	DIMENSIONS										FINISH
			A in.	A mm.	B in.	B mm.	C in.	C mm.	D in.	D mm.	E		
<b>Center Outlet Continuous Wastes - Slip Joint</b>													
559 222		1½" x 16" center, two 8" arms,	16	406	7½	191	8	203	2	51	22 GA.	Satin	
560 222		1½" x 21" center, two 10" arms	21	533	7½	191	8	203	2	51	22 GA.	Satin	
559 202		1½" x 16" center, two 8" arms	16	406	7½	191	8	203	2	51	20 GA.	Satin	
559 172B		1½" x 16" center, two 8" arms - brass nut	16	406	7½	191	8	203	2	51	17 GA.	Satin	
<b>Center Outlet Continuous Wastes - Quick Hook-Up</b>													
595 222		1½" x 16" center, two 8" arms	16	406	7½	191	8	203	2½	64	22 GA.	Satin	
595 202		1½" x 16" center, two 8" arms	16	406	7½	191	8	203	2½	64	20 GA.	Satin	



815 Chestnut Street • N. Andover, MA 01845  
 Tel: 978.688.1811 Fax: 978.794.1848  
[www.wattsbrass-tubular.com](http://www.wattsbrass-tubular.com)

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.