


Meter Centers

Uni-PAK Metering: WP Ring Style

METER CENTERS 2

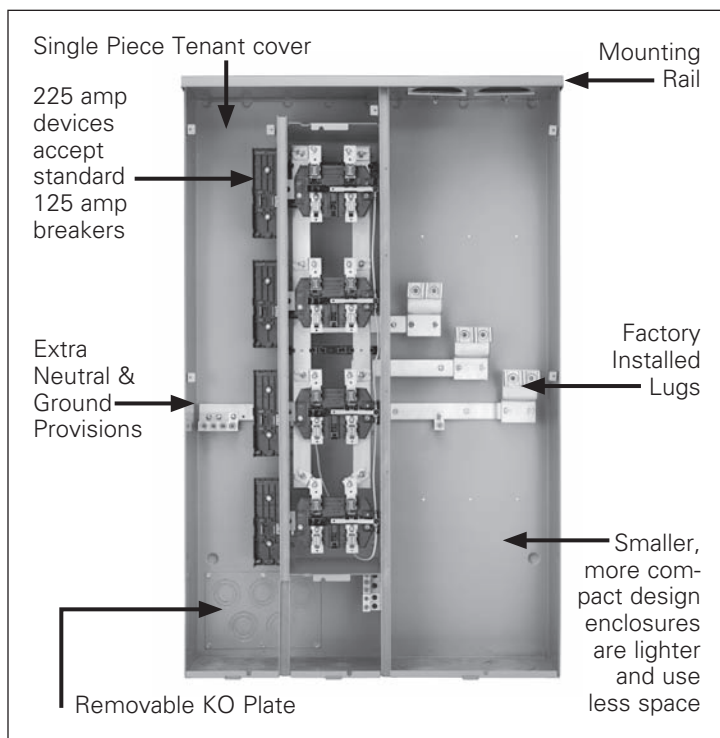

Features

- Individual split covers
- Ring style meter construction
- UL Listed for 60 / 75°C conductors. See equipment markings for applications
- For small apartment buildings, small professional and commercial buildings
- Completely self-contained meter centers
- Two to six 125A and 225A sockets breaker positions
- Outdoor surface mounted enclosures
- Compact, pre-bussed, easy to handle, hang and wire
- Barrired, sealable compartment for unmetered current-carrying parts
- Al/Cu lay-in lugs, except two position 125A units
- Top or bottom feed
- Bottom and rear branch wiring exits (Neutral and ground at bottom only)
- ANSI #61 light gray electrodeposited paint on zinc-coated G90 steel
- Field installable 5th jaw kit

Ring Style Uni-PAK 120/240V 1 Phase, 3 Wire

Maximum Tenant Main ^①	Bus Amperage	Meter Positions Per Pak	Old Catalog Number ^②	NEW Catalog Number Available Sept. 2011	Breaker Provision	Max. AIC	Dimensions ^①			5th Jaw ^① Assembly	Line Lugs Wire Range ^①
							Height	Width	Depth		
125	200	2	SP2211	WP2211	QP, QPH, HQP, MP-T, MP-HT, MP-MT	65,000	26.26	13.80	5.81	ECMF5 6:00 or 9:00	#6-300 kcmil
	300	3	SP3311	WP3311			38.75	25.42			#2-600 kcmil
	400	4	SP4411	WP4411			47.75				1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU
		5	SP4511	WP4511			38.75	38.95			
	500	6	SP4611	WP4611			47.75	26.47			
		4	SP5411	WP5411			38.75	39.01			(2) #2-600 kcmil
225	400	5	SP6511	WP6511	QP, QPH, HQP, MP-T, MP-HT, MP-MT, QS, QSH, QSHH, HQS, HQSH	100,000	38.75	40.01			
		6	SP6611	WP6611							
		2	SP4212	WP4212			29.75				
		3	SP4312	WP4312			38.75	28.53			1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU
	600	4	SP4412	WP4412			47.75				
		5	SP6412	WP6412				29.59			
		6	SP6512	WP6512				46.22			(2) #2-600 kcmil
			SP6612	WP6612							
	800	6	SP8612	WP8612			38.75				(2) 1/0-750 kcmil or (4) 1/0-250 AL or (4) 1/0-3/0 CU
	1000		NA	WP10612				51.03			(3) #2-500 kcmil

^① Dimensions and information shown are for WPXXX units. For old style information, please see the 2008 Speedfax.

^② Dimensions, ratings, and technical information shown are WP series PAK only. Consult the 2007-2008 Speedfax for information on SP series.